GeoVision inc
The Vision of Security

GV-IA1330

User's Manual



Before attempting to connect or operate this product, please read these instructions carefully and save this manual for future use.

IAV101-A

© 2026 GeoVision, Inc. All rights reserved.
Under the copyright laws, this manual may not be copied, in whole or in part, without the written consent of GeoVision.

Every effort has been made to ensure that the information in this manual is accurate. GeoVision, Inc. makes no expressed or implied warranty of any kind and assumes no responsibility for errors or omissions. No liability is assumed for incidental or consequential damages arising from the use of the information or products contained herein. Features and specifications are subject to change without notice.

GeoVision, Inc.
9F, No. 246, Sec. 1, Neihu Rd.,
Neihu District, Taipei, Taiwan
Tel: +886-2-8797-8377
Fax: +886-2-8797-8335
http://www.geovision.com.tw

Trademarks used in this manual: *GeoVision*, the *GeoVision* logo and GV series products are trademarks of GeoVision, Inc. *Windows* is the registered trademark of Microsoft Corporation.

May 2026

Scan the following QR codes for product warranty and technical support policy:

[Warranty]

[Technical Support Policy]

Contents

Naming and Definition iii

Installation Considerations iv

Chapter 1 Introduction 1

1.1 Packing List 2
1.2 System Requirements 3
1.3 Physical Description 4
1.4 Installation 6
1.5 Connecting to the Controller 6
1.5.1 Connecting RS485 / OSDP Readers 6
1.5.2 Connecting Input Devices 7
1.5.3 Connecting Output Devices 8
1.5.4 Connecting to PC 9
1.5.5 Connecting to Power 9
1.6 LED Status and Beeper 10

Chapter 2 Getting Started 11

2.1 Creating Login Credentials 12
2.2 Looking Up the Dynamic IP Address 13
2.3 Assigning an IP Address 14

Chapter 3 Cloud Integration 15

3.1 Adding the Controller to GV-Cloud Access Control 15
3.2 Receiving the Live Stream 19
3.3 Receiving Call Notifications 21

Chapter 4 Administrator Mode 24

4.1 Common 26
4.1.1 Basic Info 26
4.1.2 Local Parameters 27
4.1.3 Personalization 29
4.2 Network 29

4.2.1 Wired Network 29
4.2.2 DNS 30
4.2.3 DDNS 30
4.2.4 Port 32
4.2.5 Port Mapping 32
4.2.6 802.1x 33
4.2.7 E-mail 34
4.2.8 QoS 35
4.2.9 ONVIF 36
4.2.10 Platform Access 36
4.3 Video & Audio 36
4.3.1 Video 36
4.3.2 Audio 38
4.4 Image 39
4.4.1 Image 39
4.4.2 OSD 44
4.4.3 Privacy Mask 45
4.5 Storage 46
4.6 Security 46
4.6.1 User 47
4.6.2 Network Security 48
4.7 System 52
4.7.1 Time 52
4.7.2 Ports & Devices 53
4.7.3 Maintenance 56
4.7.4 Log 57

Chapter 5 Firmware Upgrade 58

Appendix 60

Optional Installation 60
-GV-Mount929 60


Naming and Definition


GV-Cloud Access Control	A cloud-based access control platform for access control regulation and management
GV-Cloud VMS	A cloud-based VMS platform for video surveillance.

Installation Considerations

Installation Height:

- For a building gate, GV-IA1330 should be installed about 1.4-1.5 meters above the ground.
- For a parking lot gate, GV-IA1330 should be installed about 1.2 meters above the ground to match the height of vehicles.



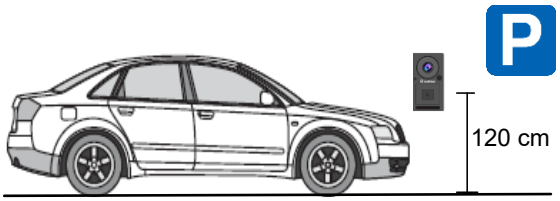


Lighting Conditions

- Avoid placing GV-IA1330 where the light source is directly behind the subject.
- Prevent light from directly falling onto GV-IA1330's camera lens.

Chapter 1 Introduction

The GV-IA1330 intercom controller features a built-in 2 MP camera and a 13.56 MHz reader. Designed for integration with the GV-Cloud Access Control platform, it enables cloud-based access management for up to 100,000 cards. The camera captures snapshots and streams live video of entry or exit to GV-Cloud Access Control during access events.

When the GV-IA1330 call button is pressed, the platform displays an incoming call screen, allowing the operator to view live video, communicate with the visitor, and perform door control operations.

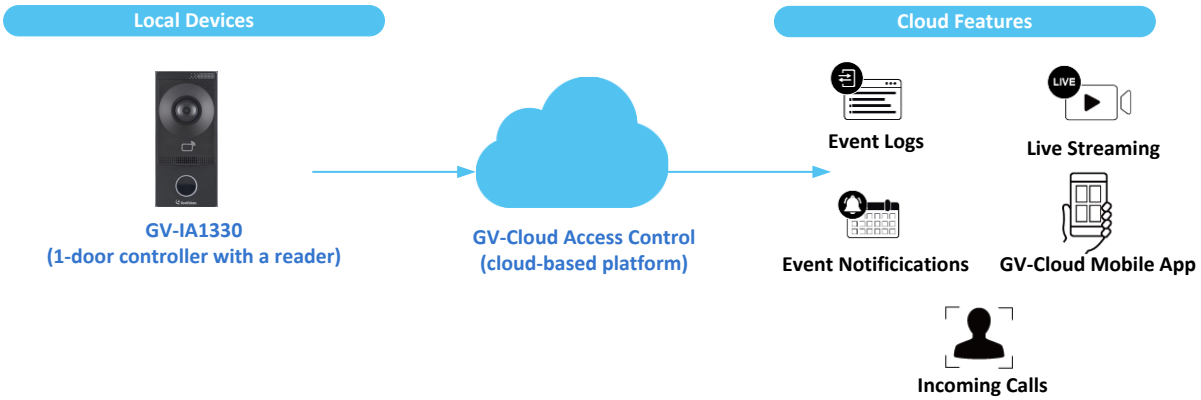

1.1 Packing List

1	GV-IA1330 Intercom Controller	6	microSD Card (32 GB)
2	Screw Kit	7	Drill Template Paster
3	Screw Driver	8	Download Guide
4	Wall Mount Bracket 	9	Embedded Bracket 
5	Function Cable 		


Note: Ensure the SD card is inserted during installation and formatted via the Web interface. Without a properly installed and formatted SD card, the controller will not function correctly.

1.2 System Requirements


To access the functions and settings of GV-IA1330 on the Web interface, ensure your PC has a good network connection and use one of the following Web browsers:

- Internet Explorer 9 x or later
- Microsoft Edge
- Google Chrome
- Firefox

Note: To use complete live view features, users of non-IE browsers should download the plugin from the GV-IA1330 Web interface.

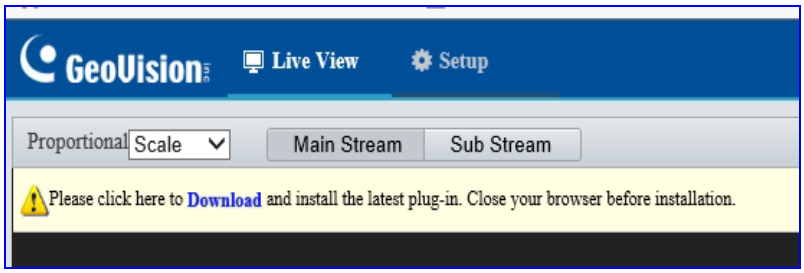

1.3 Physical Description

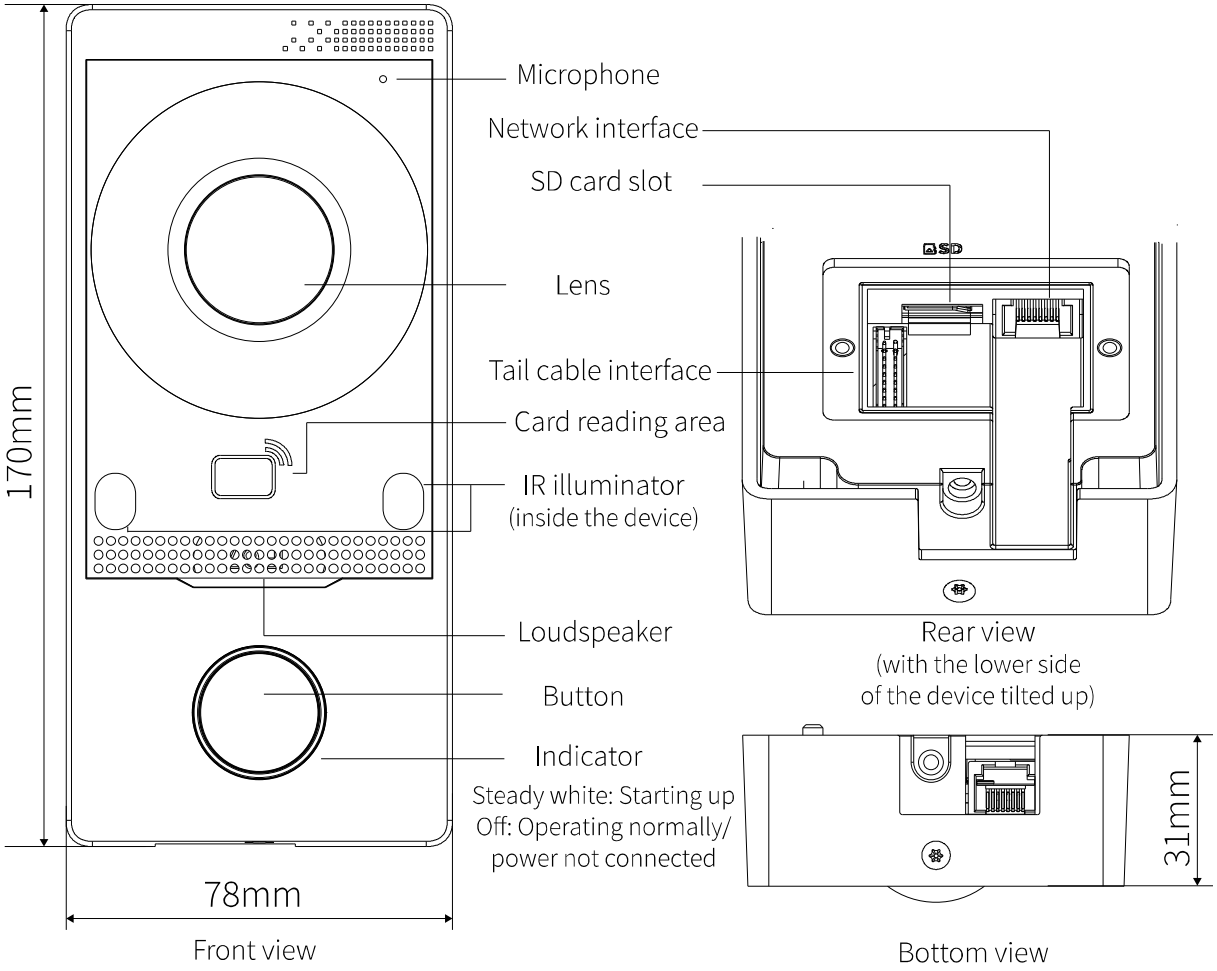

The cable specifications are as follows:

Cable	Color	Description
RS485_A	Orange	Connect RS-485 interface
RS485_B	Yellow	
GND	Black	
ALM_IN1 (Door Sensor)	Purple	Connect Alarm input interface
ALM_IN2 (Door Button)	White/Purple	
ALM_IN3 (Fire Sensor)	Light Green	
ALM_IN4 (Tamper Sensor)	Yellow/Black	
GND	Black	Connect Power interface
VDD12V	Red	
LOCK1_NC (Door Lock)	Pink	Connect Door lock interface
LOCK1_COM (Door Lock)	White/Yellow	
LOCK1_NO (Door Lock)	White/Green	
LOCK2_NC (Alarm)	Gray	
LOCK2_COM (Alarm)	White/Orange	
LOCK2_NO (Alarm)	White/Blue	
GND	Black	

*


1.4 Installation

See the *Installation Guide* for mounting GV-IA1330 to a wall or a recess surface.

1.5 Connecting to the Controller

1.5.1 Connecting RS485 / OSDP Readers

GV-IA1330 supports connection for up to two RS-485 or OSDP readers. To connect, wire the RS-485 terminals on GV-IA1330 to the readers, and ensure a separate power source is provided for each reader.

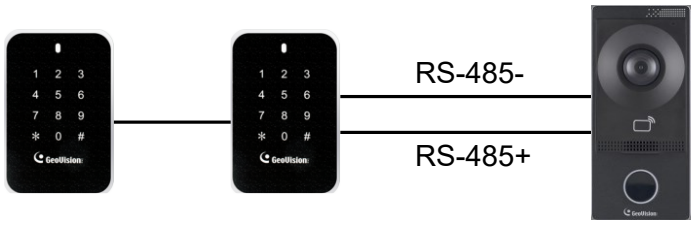

Up to 2 GV-Readers

Controller

The table below shows the cable assignments for the RS-485 connection.

Cable	Color
RS-485 A (+)	Orange
RS-485 B (-)	Yellow

Note: For the RS-485 connection, connect only one of the following reader types to GV-IA1330: either GeoVision RS-485 readers or OSDP-compliant readers. Mixing both types is not supported.

1.5.2 Connecting Input Devices

GV-IA1330 supports four types of input connections:

1. Door Sensor, e.g. door status sensors
2. Door Button, e.g. door openers and exit buttons
3. Fire Sensor
4. Tamper Sensor

All inputs are **dry contact** and configurable as Normally Open (NO) or Normally Closed (NC) through the GV-IA1330's Web interface. The default value is **NO**. To change input status, see *4.7.3 Ports & Devices*.

The table below shows cable assignments for input connections on GV-IA1330.

Cable	Color
ALM_IN1 (Door Sensor)	Purple
ALM_IN2 (Door Button)	White/Purple
ALM_IN3 (Fire Sensor)	Light Green
ALM_IN4 (Tamper Sensor)	Yellow/Black

1.5.3 Connecting Output Devices

GV-IA1330 supports two types of output connections:

1. Door Lock, e.g. electronic locks
2. Alarm, e.g. door held open alarm, door forced open alarm, fire alarm, and tamper alarm


The table below shows cable assignments for output connections on GV-IA1330.

Cable	Color	Cable	Color
LOCK1_NC (Door Lock)	Pink	LOCK2_NC (Alarm)	Gray
LOCK1_COM (Door Lock)	White/Yellow	LOCK2_COM (Alarm)	White/Orange
LOCK1_NO (Door Lock)	White/Green	LOCK2_NO (Alarm)	White/Blue

Connecting an Output Device


To connect a locking device to **GV-IA1330**, follow the steps below:

1. Connect the **(+) terminal** of the locking device to the **Door COM** wire on GV-IA1330.
2. Connect the **(-) terminal** of the locking device and the **(-) terminal** of the external power supply **together**.
3. Connect the **(+) terminal** of the external power supply to either the **Door NO** or **Door NC** wire on GV-IA1330, depending on the desired operating state of the locking device.

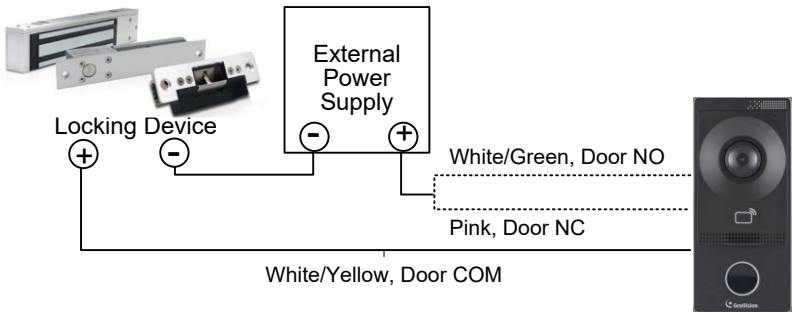

1.5.4 Connecting to PC

Connecting GV-IA1330 to a computer allows access to its **Web interface** for configuration and device management. It also enables integration with the **GV-Cloud Access Control** platform for monitoring and managing access control activities.

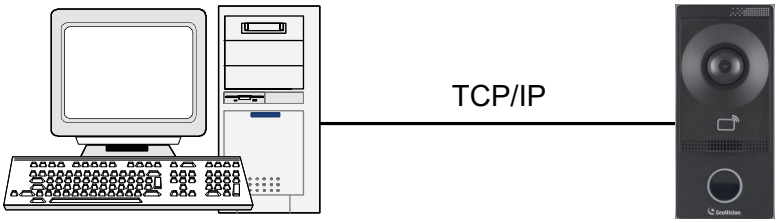

1.5.5 Connecting to Power

You can choose to supply power using a power adapter or using a Power over Ethernet (PoE) adapter.

- To use a Power adaptor, connect the controller's 12V and GND wires to a 12V, 1A power adapter before connecting it to a power source.

The table below shows the wire assignments for the power connection on GV-IA1330.

Cable	Color
GND	Black
VDD12V	Red

- To use a PoE adapter, power is provided to the unit through the Ethernet cable.

1.6 LED Status and Beeper

The following table outlines the LED ring indicators and beeper responses under various operating conditions of the device, including startup, day mode, and night mode.



Condition	LED Ring	Beeper
Startup	White light for 30 sec	Short beep *4
Day Mode		
Standby	No LED	N/A
Access Granted	Flash white momentarily	Sound: “Door opened successfully”
Access Denied	Flash white momentarily	Sound: “Card verification failed”
Call Button Activated	No LED	Dialing sound for 30 sec
Talk Mode Enabled	No LED	N/A
Night Mode		
Standby	Constant white	N/A
Access Granted	Flash white momentarily	Sound: “Door opened successfully”
Access Denied	Flash white momentarily	Sound: “Card verification failed”
Call Button Activated	Constant white	Dialing sound for 30 sec
Talk Mode Enabled	Constant white	N/A

Chapter 2 Getting Started

This chapter contains basic information on how to connect GV-IA1330 to the network.

[Network Connection]

To connect GV-IA1330 to the network, follow the steps outlined below:

1. Connect the controller to the network using a regular network cable.
2. Connect power using one of these methods:
   - Use a power adapter. See *1.5.5 Connecting to Power*.
   - Use Power over Ethernet (PoE). The power will be provided over the network cable.
3. Access the GV-IA1330 Web interface.
   - If GV-IA1330 is installed in a LAN as a DHCP server, use GV-IP Device Utility to look up its dynamic IP address. See *2.2 Looking Up the Dynamic IP Address*.
   - If GV-IA1330 is installed in a LAN without a DHCP server, it will use the default IP address of **192.168.0.10**. You can also assign a different static IP. See *2.3 Assigning an IP Address*.

[Controller Settings]

Once GV-IA1330 is properly installed, refer to the following sections to configure the door lock, alarms, outputs, readers and GV-Cloud Access Control connection.

- **To connect to GV-Cloud Access Control and receive call notifications**, see *Chapter 3 GV-Cloud Access Control Integration*.
- **To adjust doorbell volume**, see *4.7.2 Ports & Devices*.
- **To configure the door lock, alarms, outputs, extra readers**, see *4.7.2 Ports & Devices*.


2.1 Creating Login Credentials

When purchasing a new GV-IA1330 or after loading the default, you need to set up a login password for it.

Note: By default, the Administrator's username is **admin** and cannot be modified.

---

1. Download and install GV-IP Device Utility from the GeoVision website. The PC running the utility must be on the same LAN as the GV-IA1330.
2. On the GV-IP Utility window, click the button to search for IP devices connected to the same LAN. Click the **Name** or **Mac Address** column to sort.
3. Identify your GV-IA1330 by its MAC address, click on its IP address and select **Create User Account**. This dialog box appears.

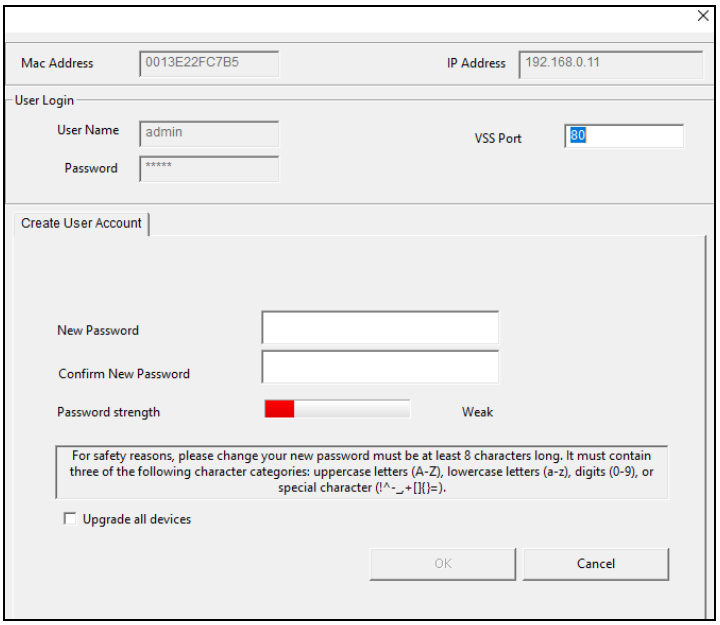

4. Type a password. The new password must meet the password strength requirements.
5. Click **OK.**

2.2 Looking Up the Dynamic IP Address

When the controller is connected to LAN with a DHCP server, it is automatically allocated a dynamic IP address. To obtain the IP address and access the GV-IA1330 Web interface, follow the steps below.


Note: By default, the Administrator's username is **admin** and cannot be modified.

---

1. Download and install GV-IP Device Utility from the GeoVision website. The PC running the utility must be on the same LAN as the GV-IA1330.

1. On the GV-IP Utility window, click the button to search for IP devices connected to the same LAN. Click the **Name** or **Mac Address** column to sort.

2. Identify your GV-IA1330 by its MAC address, click on its IP address and select **Web Page**.

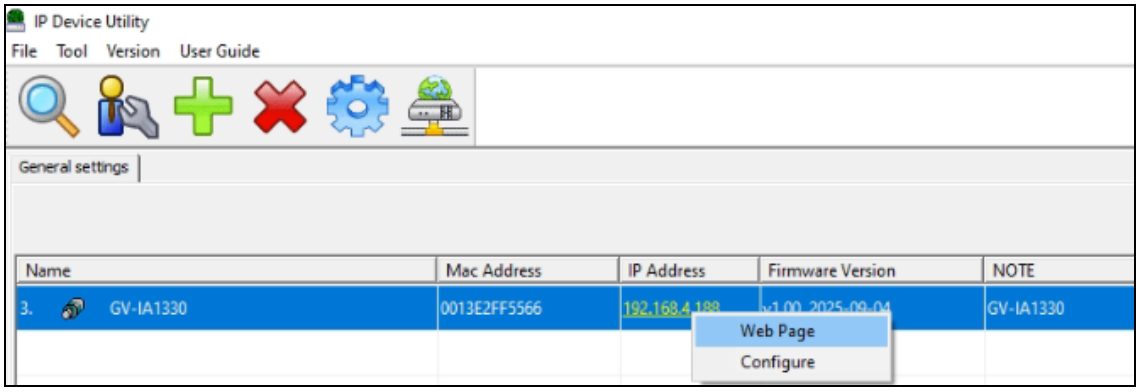


3. On the login page, enter the username (admin) and password to access the live view.

2.3 Assigning an IP Address

When the controller is connected to LAN without a DHCP server, it will use the default IP address **192.168.0.10**. Follow the steps below to assign a new IP address to avoid IP conflict with other GeoVision devices.

Note: GV-IA1330 has the default IP address 192.168.0.10. The PC used to set the IP address must be on the same network as the GV-IA1330.

1. Open the Web browser, and type the default IP address http://192.168.0.10
2. Type the username (admin) and password and click **Apply**.
3. Click **Setup**, and select **Common** in the left menu > **Network** > **Basic Config**.
4. Select **Static** from Obtain IP Address.

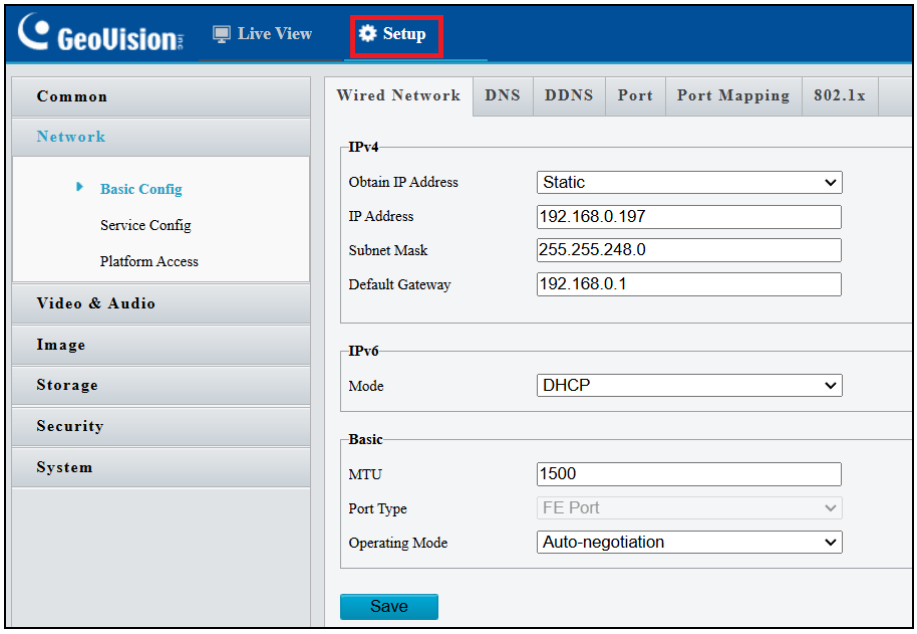

5. Type the IP Address, Subnet Mask and Default Gateway.
6. Click **Apply**. The GV-IA1330 is now accessible by entering the assigned IP address into a Web browser.

Note: If PPPoE is enabled, verify the IP address GV-IA1330 will get from the ISP for login. If your GV-IA1330 connects to a public dynamic IP address via PPPoE, first use the Dynamic DNS service to obtain a domain name that corresponds to the unit's changing IP address. For details on Dynamic DNS Server settings, see *4.2.3 DDNS*.

Chapter 3 Cloud Integration

This chapter guides you through the configurations for adding the GV-IA1330 controller to the **GV-Cloud Access Control** platform, receiving snapshots and live streams of access events, and viewing incoming call notifications.

3.1 Adding the Controller to GV-Cloud Access Control

To add the GV-IA1330 controller to GV-Cloud Access Control, you must first acquire a **GV-Cloud Access Control license** from GeoVision and create a **GV-Cloud account ID**. Follow the steps below to:

- Sign up for the GV-Cloud platform
- Add the controller to GV-Cloud Access Control
- License the GV-IA1330 controller
- Verify the connection

[Signing up on GV-Cloud]


1. Visit GV-Cloud at https://www.gvaicloud.com/ and click **Sign up**.
2. Enter the necessary information and complete the registration process. For details, see *2.1 Login*, in the *GV-Cloud Access Control User's Manual*.

[Configuring the Controller]

3. On the controller's Web interface, click **Setup**

4. In the left menu, click **Network** > **Platform Access**.

5. Under Cloud Access Account, type your **GV-Cloud account ID** and create a password for the controller to connect to GV-Cloud Access Control. Click **Apply**.

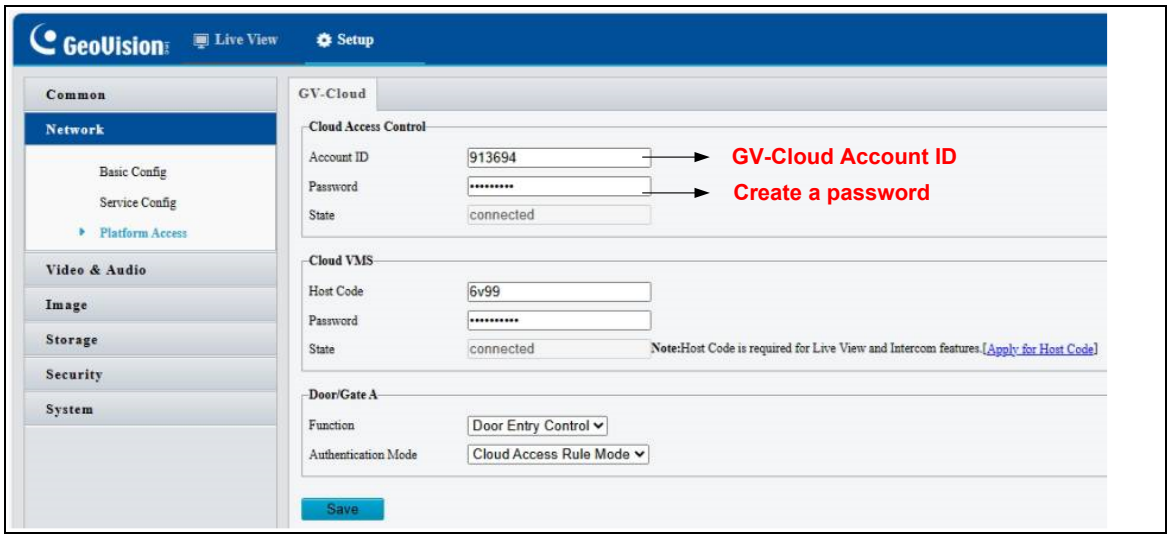

6. Configure the following Door A settings:

[Door/Gate A]


- **Function:** Define whether the controller is installed for entrance or exit control.
- **Authentication Mode:** Select the desired access rules.
  - **Local Unlock Mode:** Select the mode to open the door / gate. The held-open state cannot be cleared through GV-Cloud Access Control.
  - **Local Lock Mode:** Select the mode to lock the door / gate. The locked state cannot be cleared through GV-Cloud Access Control.
  - **Cloud Access Rule Mode:** Select the mode to apply the access rules configured on GV-Cloud Access Control.

[Adding the Controller to GV-Cloud Access Control]


7. Once logging in to GV-Cloud, select **Access Control**.
8. On the Monitoring page, click the **Add Device** button. The Add Device dialog box appears.




9. Select **GV-IA1330** from the Model dropdown list, and click the **Search** button. The controller is detected and displayed. Otherwise, type the controller's MAC Address.

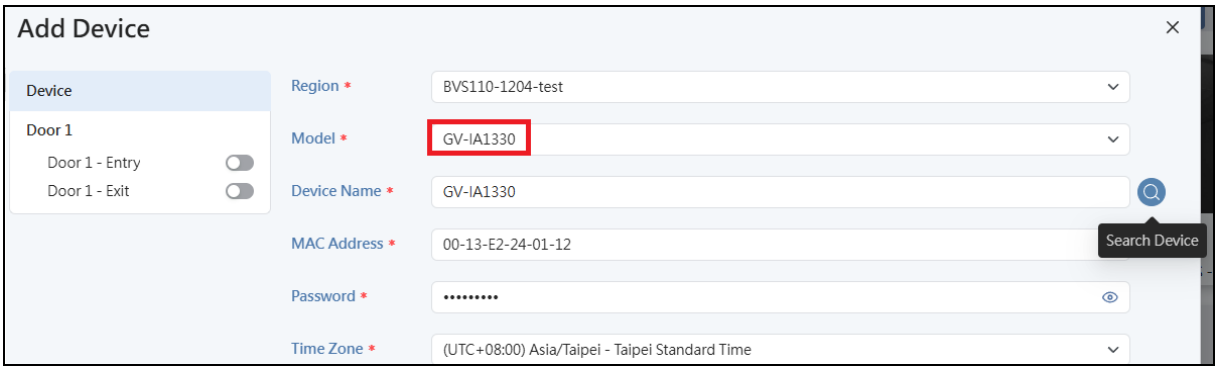

10. Select the controller on the Search Device dialog box, and click **OK**.
11. Type the password created on the GV-IA1330 Web interface (see step 5), and enable **Door Entry** or **Door Exit** based on the real scenario.

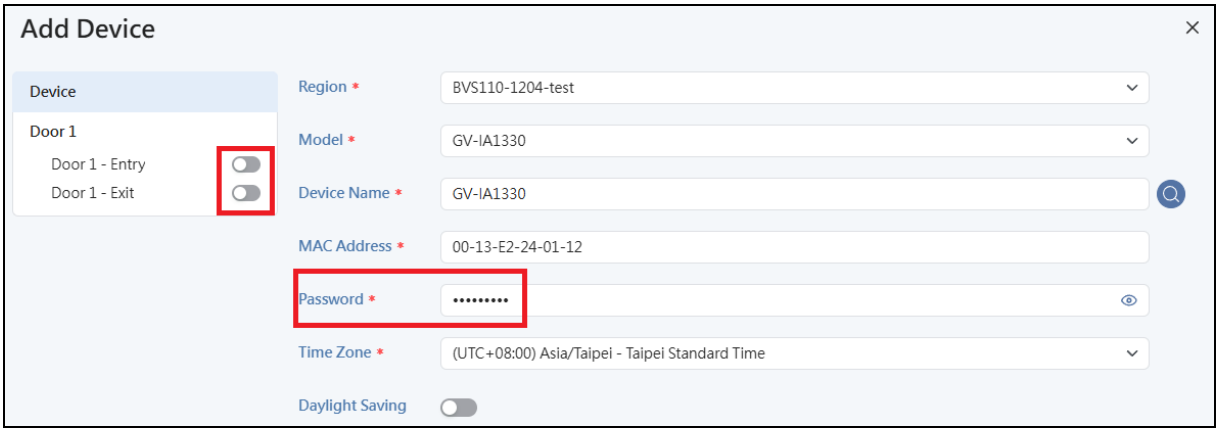


12. Click **Save**. The GV-IA1330 controller is shown on the main screen with a red icon

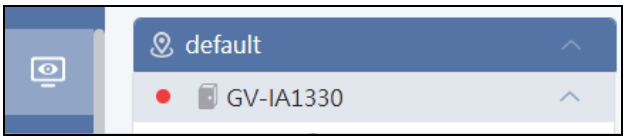

[Licensing the Controller]

13. To license the controller, click the **Account** icon at the bottom left > **Account Settings** > **Subscription** .

14. Click **Access Control** under Subscription, open your order plan, click **License Doors**, select the added controller, and click **Save.**

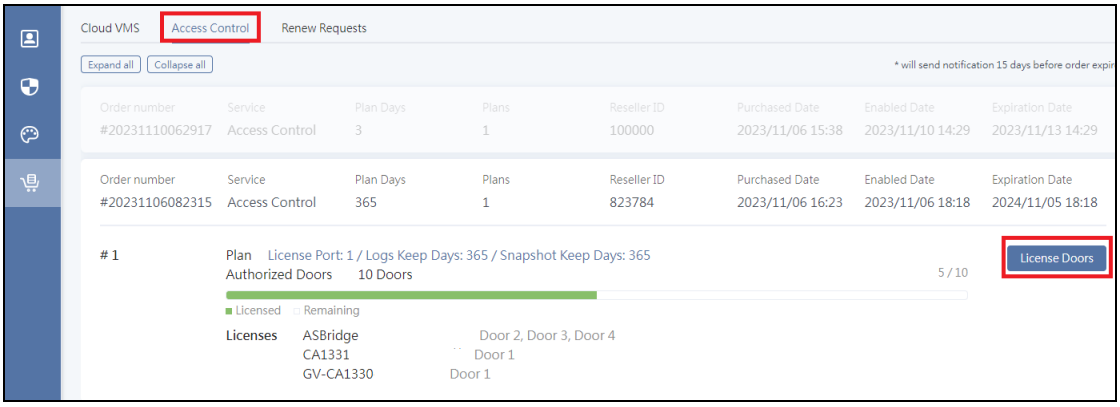

Once the controller is licensed, its red icon on the main screen of GV-Cloud Access Control turns green, indicating that the connection was successful.

[Verifying the Connection]

When you press the call button on GV-IA1330, a **"Door Bell Activated"** message will pop up from the bottom right of the GV-Cloud Access Control webpage. This message prompts you to download the **Windows Player** to enable doorbell features. Install the player and refresh your browser.


Note: The live view and intercom features require a **Host Code**. As a result, the incoming call screen may not immediately display a live view. To obtain the Host Code and enable live streams, follow the steps outlined in *3.2 Receiving the Live Stream.*

3.2 Receiving the Live Stream

To receive the live stream from the controller on the GV-Cloud platform, follow the steps below to create a host on **GV-Cloud VMS**:

[Creating a Host on GV-Cloud VMS]

1. In the left menu, click the **GV-Cloud Apps** icon > **Cloud VMS**.

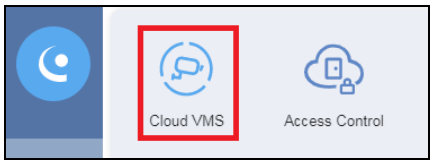

2. Select **Hosts** in the left menu, and click + at the top right. The Add Host dialog ox appears.
3. Type a desired **Display Name**, **Password** (used for GV-Cloud VMS login), and select **Time Zone** for the host. All other fields are optional.




4. Click **Apply**. The message "Host has been added" appears. Keep the generated **Host Code** and **Password** for configuring the controller.




[Configuring the Controller]

5. On the controller's Web interface, click **Setup**
6. In the left menu, click **Network** > **Platform Access**.
7. Under Cloud VMS, type **GV-Cloud VMS Host Code** and **Password** (created at Step 4). Click **Save**.

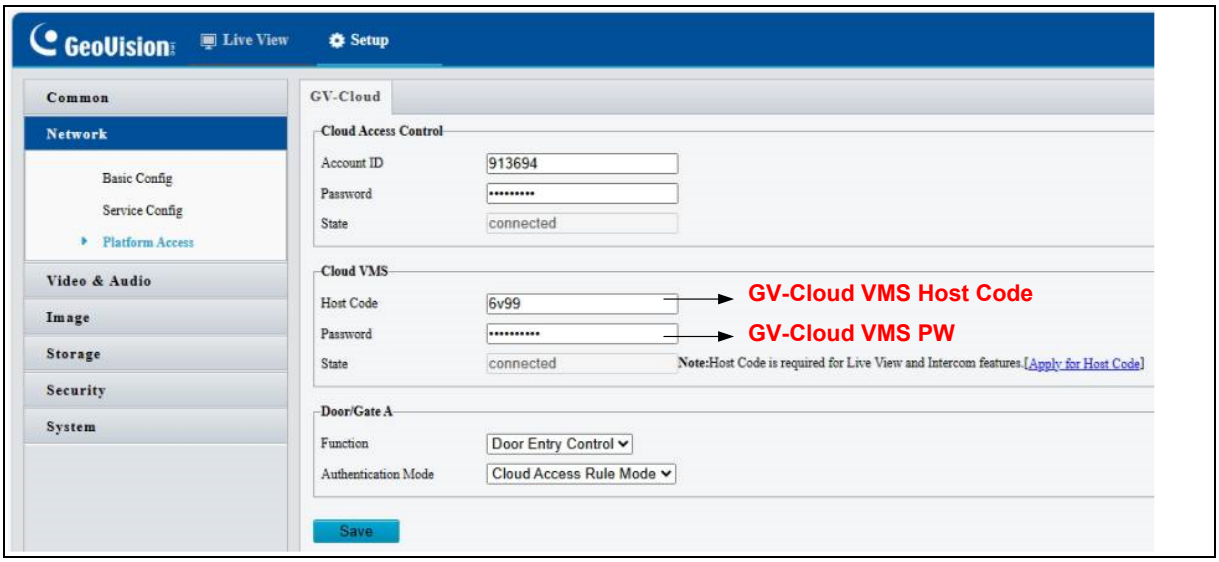


Once the connection is successfully established:

- The "connected" state will appear on the controller's Web interface.
- On the **Hosts** page of GV-Cloud VMS, the host will be marked with a green icon, indicating a successful connection, as shown below.

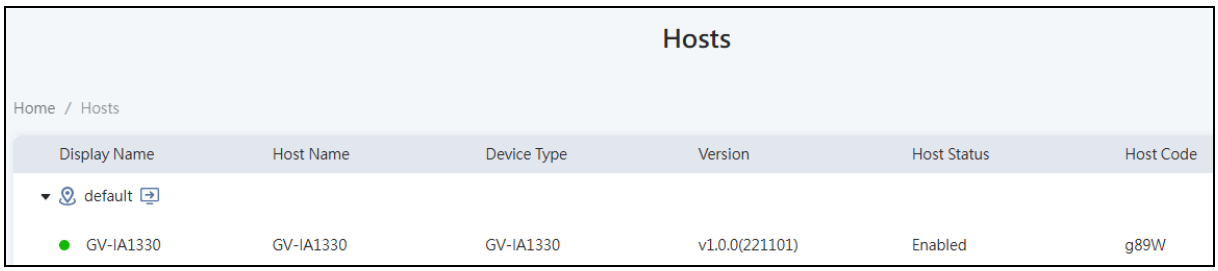

Tip: To change the host's password for GV-Cloud VMS connection, go to the **Hosts** page and click the host in the list. Click the **Edit** button, scroll down, and reset the password as needed.

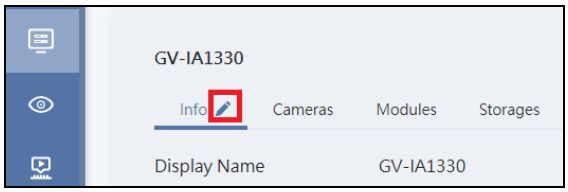


3.3 Receiving Call Notifications

When the call button on GV-IA1330 is pressed, GV-Cloud Access Control displays an incoming call screen in the bottom right corner of the Web interface.


Player Download Prompt

For first-time users, a prompt will appear in the same location requesting installation of the **Windows Player** to enable doorbell features. After installing the player, refresh your browser to activate the functionality.

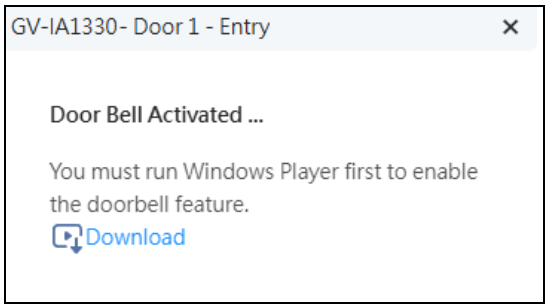

Incoming Call Screen

The three buttons in the bottom right corner of the incoming call screen allow you to **answer the call, end the call, or unlock the door** (arranged from left to right).

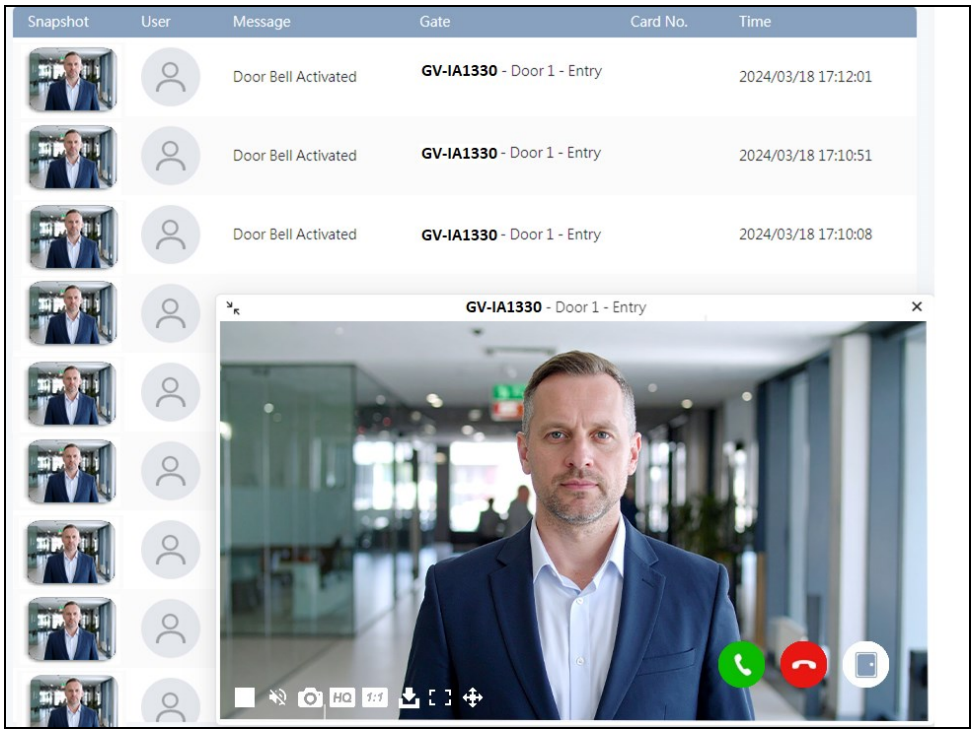


Note: The incoming call screen will display for about 30 seconds before the next call arrives.


Video Window

When an access event occurs, a snapshot accompanied by its log appears on the **Monitoring** page of GV-Cloud Access Control. Double-clicking the snapshot opens a video window. To view the live stream, click the **Live Video** tab located at the top of the window.

[Logs on the Monitoring page]

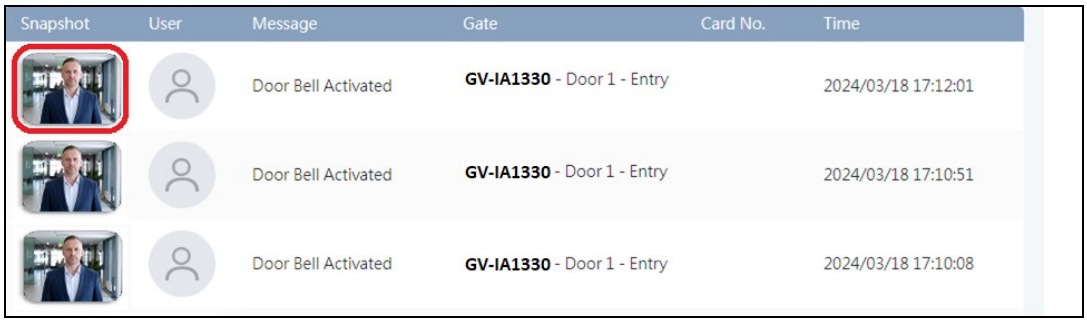

[Video Window]

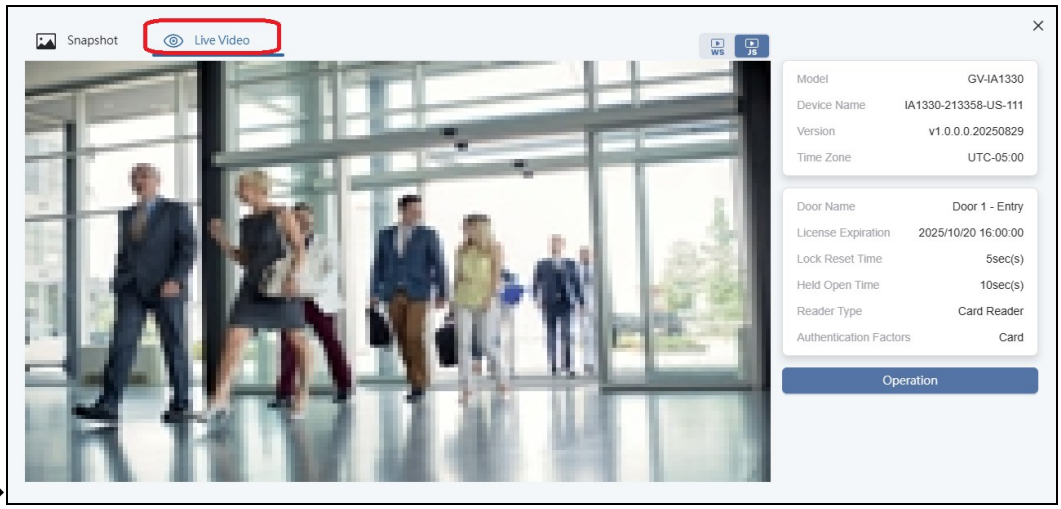


Note: When connecting GV-IA1330 with GV-Cloud Bridge series, its recordings can be stored in GV-Cloud Bridge and remotely played back on **GV-Cloud VMS** (not GV-Cloud Access Control).

Push Notifications on GV-Cloud Mobile App

To enable push notifications from GV-IA1330 on the **GV-Cloud mobile app**, configure the following options in the **GV-Cloud Access Control** platform:


1. In the left menu, select **Alert** to create an alert rule for GV-IA1330.
2. Define conditions, such as Time and Gates, to trigger the notifications.
3. Select **Door Bell Activated**, **Intercom Answering**, and **Intercom Closed** for Trigger Messages.
4. Select **Push Notification** for Alert Approach.

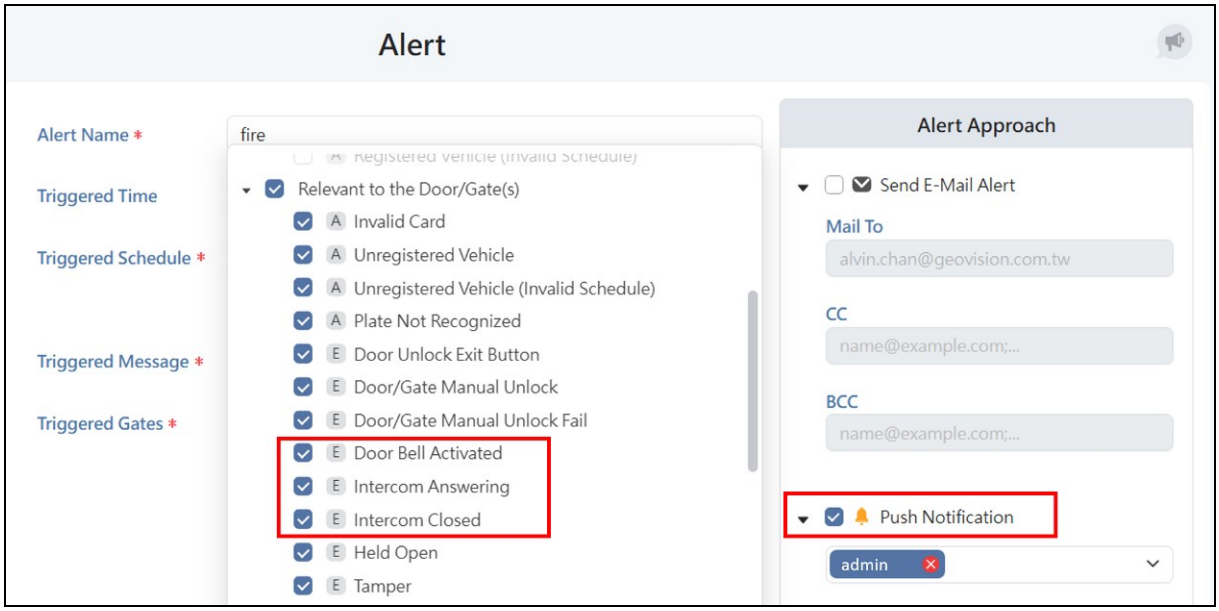

When the call button on GV-IA1330 is activated, the mobile app will display an incoming call screen. See *12.1 Push Notifications for GV-IA1330* in *GV-Cloud Mobile Installation Guide* for details.

Chapter 4 Administrator Mode

The Administrator can access and configure the controller through the network. Click **Setup** at the top of the Web interface to access the following configuration tabs: **Common**, **Network**, **Video & Audio**, **Image**, **storage**, **Security** and **System**.

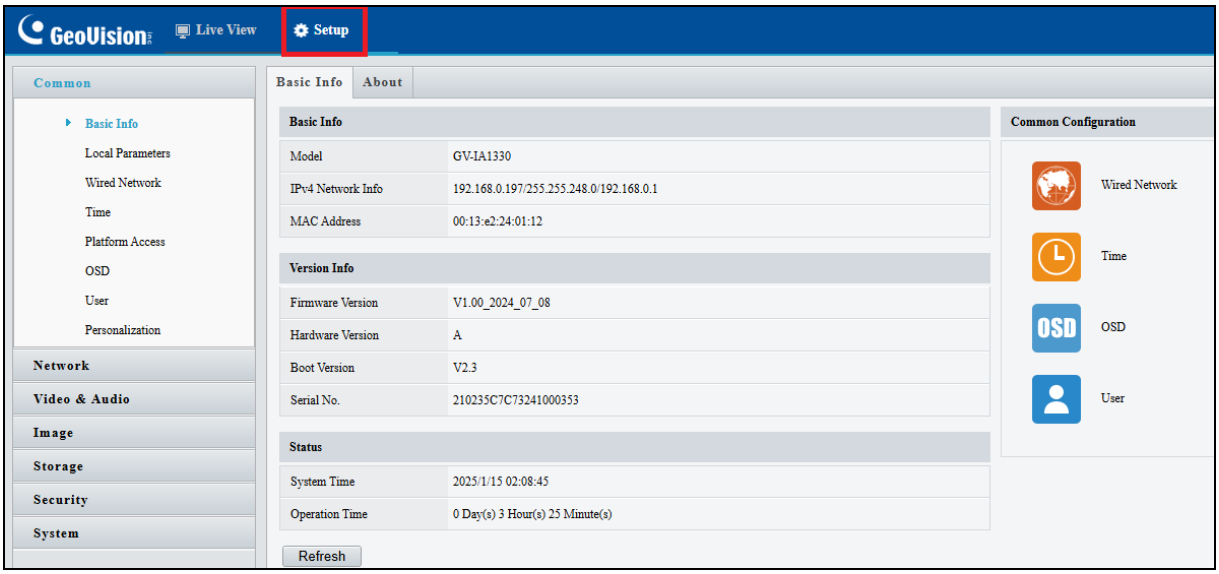

List of Options

See the table below for the settings available on the Web interface. Find the topic of interest by referring to the section number prefixed to each option.

4.1 Common	4.1.1 Basic Info 4.1.2 Local Parameters 4.1.3 Platform Access 4.1.4 Personalization
4.2 Network	• Basic Config 4.2.1 Wired Network 4.2.2 DNS 4.2.3 DDNS 4.2.4 Port 4.2.5 Port Mapping 4.2.6 802.1x • Service Config 4.2.7 E-Mail 4.2.8 QoS 4.2.9 ONVIF • Platform Access 4.2.10 Platform Access
4.3 Video & Audio	4.3.1 Video 4.3.2 Audio
4.4 Image	4.4.1 Image 4.4.2 OSD 4.4.3 Privacy Mask
4.5 Storage	Storage
4.6 Security	4.6.1 User 4.6.2 Network Security
4.7 System	4.7.1 Time 4.7.2 Ports and Devices 4.7.3 Maintenance 4.7.4 Log

4.1 Common


Under the **Common**, you can find the controller's general settings.

For the following functions under the Common, see the related sections as indicated.

- **Local Parameter**: See *4.1.2 Local Parameter* for details.
- **Wired Network:** See *4.2 Network* for details.
- **Time:** See *4.7.1 Time* for details.
- **OSD:** See *4.4.2 OSD* for details.
- **User:** See *4.6.1 User* for details.
- **Personalization:** See *4.1.3 Personalization* for details.


4.1.1 Basic Info

You can view the controller's current status. Click **Refresh** for the latest status information. Under **Common Configuration** on the right, you can click on the icons to quickly access the corresponding configuration pages.

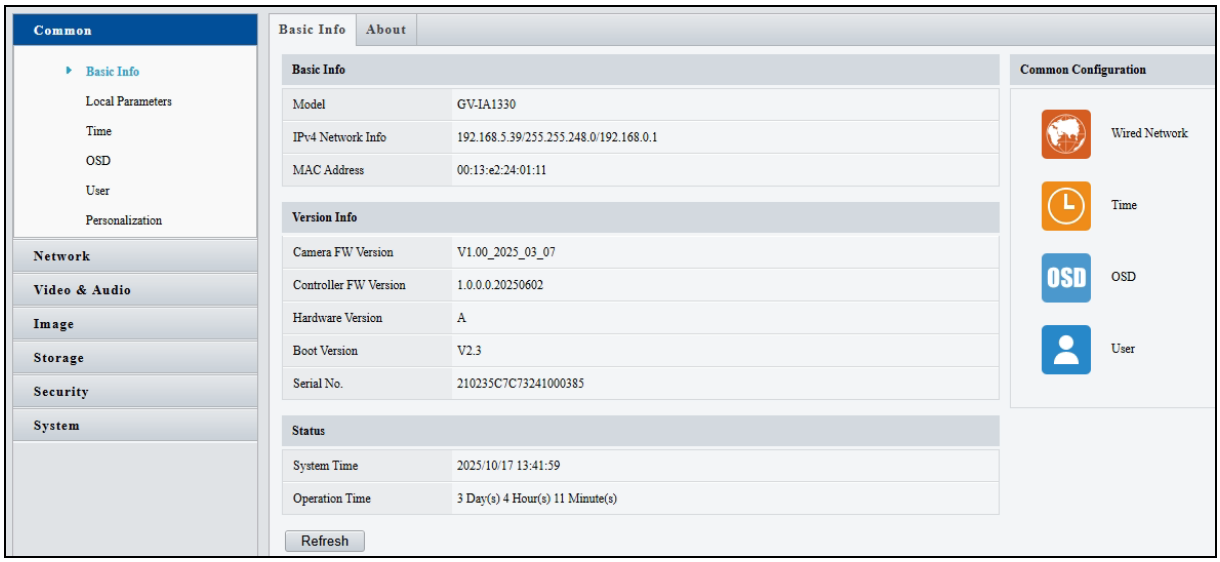

4.1.2 Local Parameters

You can set the local parameters for your PC.

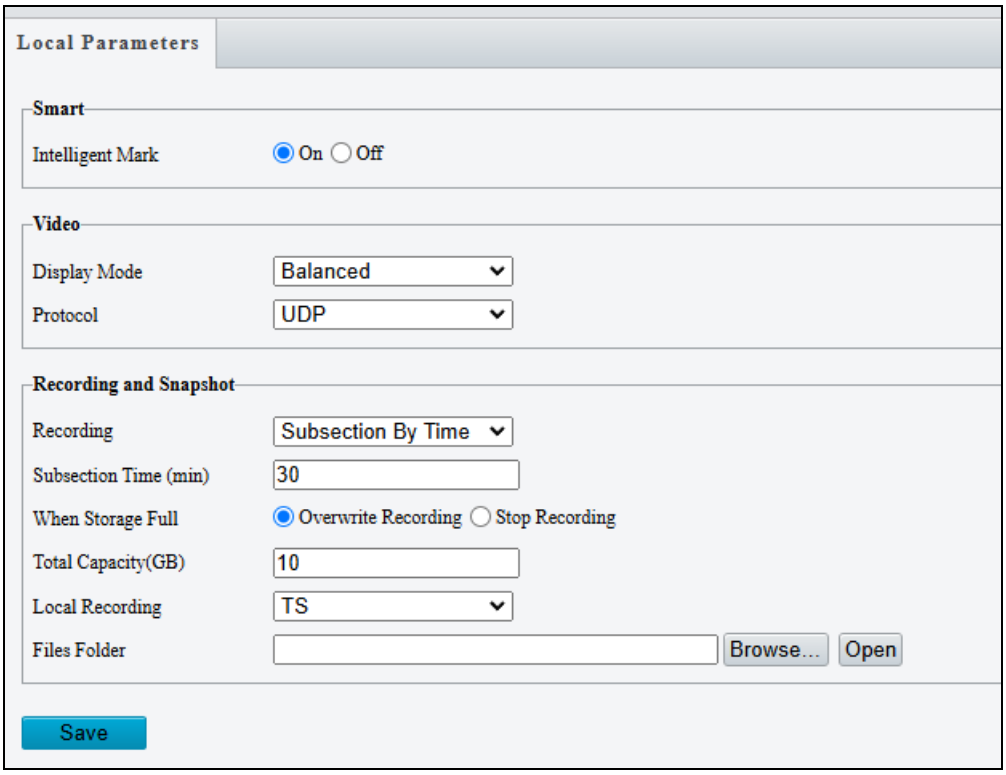

[Intelligent Mark]

****The Intelligent Mark function is not supported by GV-IA1330.****

- **Intelligent Mark:** When enabled, the detection line or area as defined by **Smart Settings** will be displayed. See details in *3.6.1 Smart Settings*.

[Video]

- **Display Mode:** Set the display mode according to the network status, including **Min. Delay**, **Balanced Delay**, and **Fluent Delay** for low to high delay. Or customize the display mode parameters by selecting **Custom**.
- **Protocol:** Select the protocol used to transmit media streams to be decoded by the PC.


[Recording and Snapshot]

****The Recording and Snapshot functions are not supported by GV-IA1330.****

- **Recording**
  - ⊙ **Subsection by Time (1~60):** Set a maximum time length of each recording file. If you specify 5 minutes, a 30-minute event will be chopped into six 5-minute event files.
  - ⊙ **Subsection by Size:** Set a maximum size limit of each recording file.
- **When Storage Full**
  - ⊙ **Overwrite Recording**: When the memory card is full, the controller deletes the old recordings to make room for new ones.
  - ⊙ **Stop Recording**: Recording stops automatically when the memory card is full.
- **Total Capacity (1~1024):** Set a capacity limit to the memory card.
- **Local Recording:** Set the file format for saving local recordings, including TS and MP4.
- **Files Folder**: Click **Browse** to set a folder to store the recorded videos and captured snapshots at your local computer.

4.1.3 Personalization


****The Personalization function is not supported by GV-IA1330.****

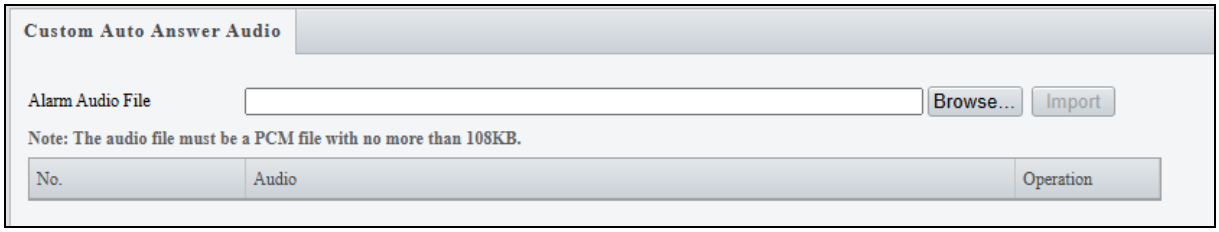

4.2 Network

Under the **Network**, you can configure the network settings, the e-mail server for notifications and the login account for the GV-Cloud platform.

4.2.1 Wired Network

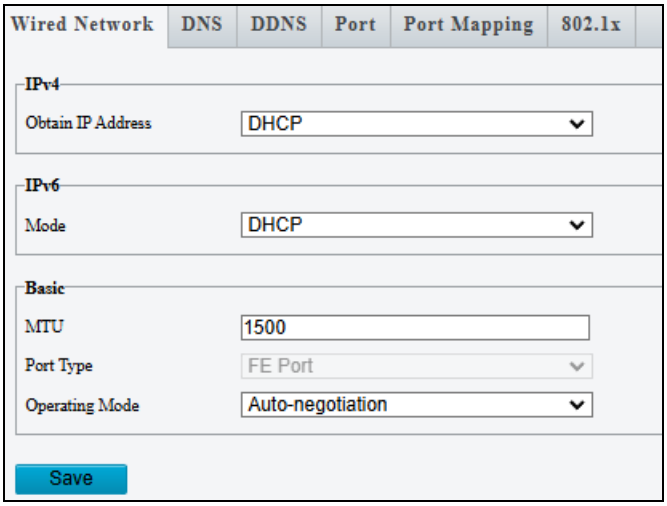

- **Obtain IP Address:** Select **Static IP**, **DHCP**, or **PPPoE** according to your network environment.

  ⊙ **Static IP address:** Assign a static IP or fixed IP to the controller. Type the controller's IP address, subnet mask and default gateway.


Parameters	Default
IP address	192.168.0.10
Subnet Mask	255.255.255.0
Default Gateway	192.168.0.1

- ⊙ **PPPoE:** The network environment is xDSL connection. Type the Username and Password provided by ISP to establish the connection. If you use the xDSL connection with dynamic IP addresses, first use the DDNS function to obtain a domain name linking to the controller's changing IP address.
- ⊙ **DHCP:** The network environment has a DHCP server which will automatically assign a dynamic IP address to the controller. You can look up the current IP address using GV-IP Device Utility.

- **IPv6:** Type the controller's **IPv6 Address** and **Default Gateway**. Optionally change the **Prefix Length** according to your network settings.
- **MTU:** Type the Maximum Transfer Unit (MTU). The default value is **1500.**
- **Operating Mode:** Select a mode to control the bandwidth.


4.2.2 DNS

Specify the controller's **Preferred DNS Server** and **Alternate DNS Server**.

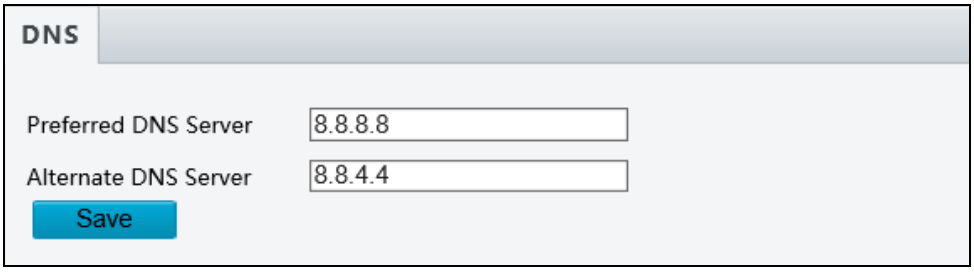

4.2.3 DDNS


DDNS (Dynamic Domain Name System) provides a convenient way for accessing the controller when operating under a dynamic IP environment. It assigns a **domain name** to the controller, allowing users to connect without manually checking whether the IP address — assigned by a DHCP server or ISP (in xDSL connection) — has changed.

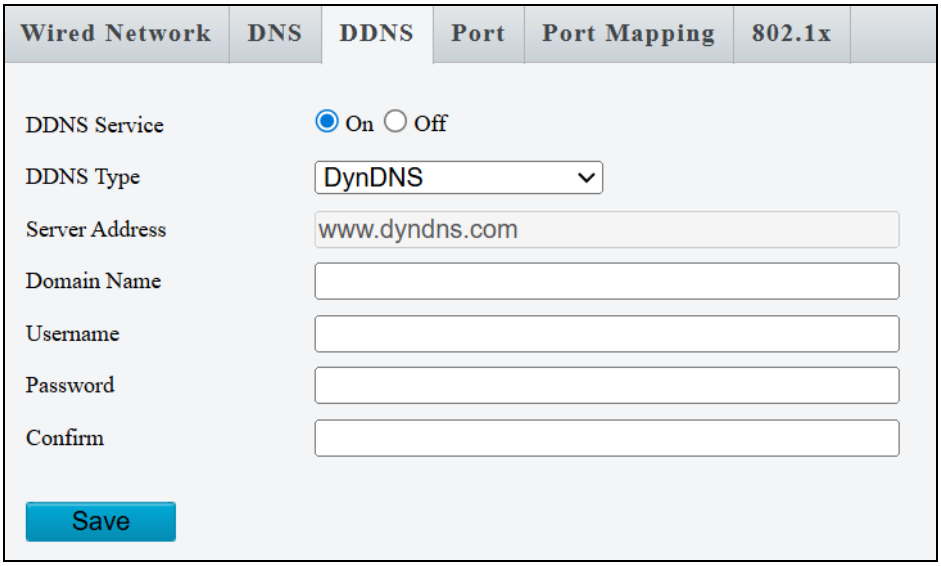

To enable and configure DDNS on the controller:


1. Click **On** to enable the DDNS service.
2. Select a DDNS service provider you have registered with.
3. Type the registered **Domain Name**, **Username**, or **Password,** based on the DDNS service requirements.
4. Confirm the password.
5. Click **Save**.

Once DDNS is successfully configured, a notification bar will appear. For future logins, access the controller using the assigned domain name, e.g., yourhostname.dyndns.org.

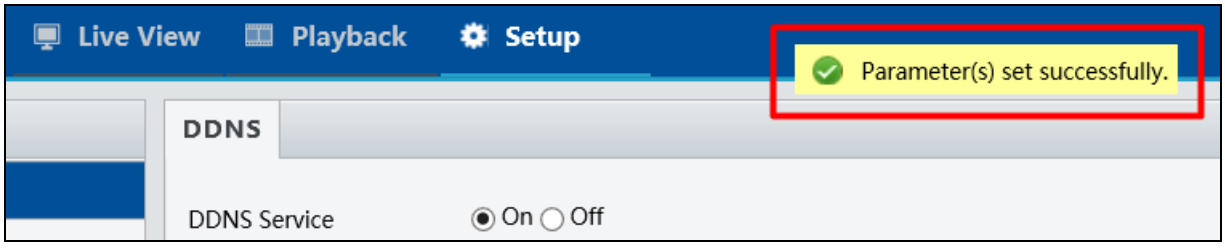

4.2.4 Port


You can modify the default **HTTP**, **HTTPS** and **RTSP** ports as needed.

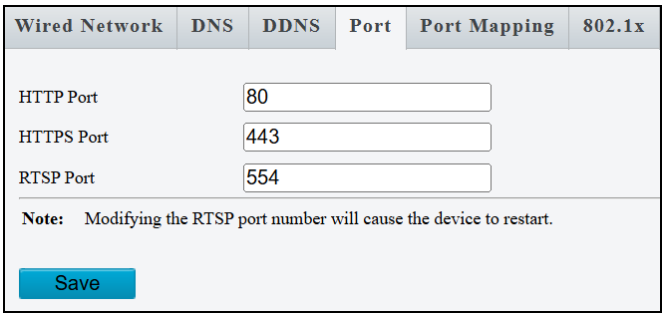

4.2.5 Port Mapping

The Port Mapping function enables the controller to automatically forward and open specific ports on your router. This allows remote access to the controller from the Internet, streamlining connectivity without manual port configuration.

1. Enable **Port Mapping**
2. Select **UPnP** or **Manual** for Mapping Type.
   - If your router supports **UPnP**, select **Auto** or **Manual** to configure external ports automatically or manually.

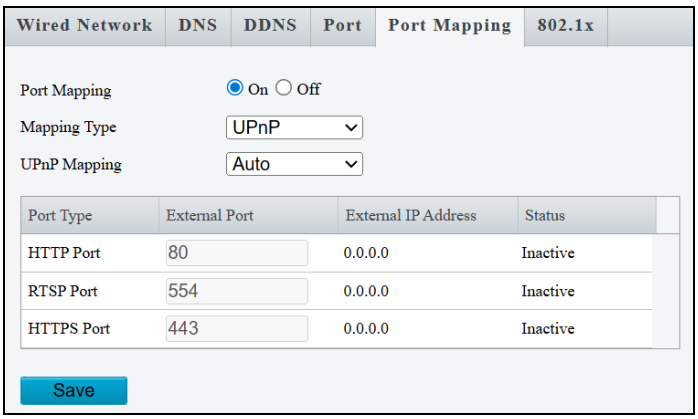

   - If your router does not support UPnP, select **Manual** and configure external ports. If the configured port is occupied, the **Status** will show inactive.
3. Click **Save**.

Note: For this function to work, your router needs to support **port forwarding**.

4.2.6 802.1x

IEEE 802.1x is an IEEE standard for port-based network access control. It provides an authentication mechanism for devices attempting to connect to a LAN or WLAN.

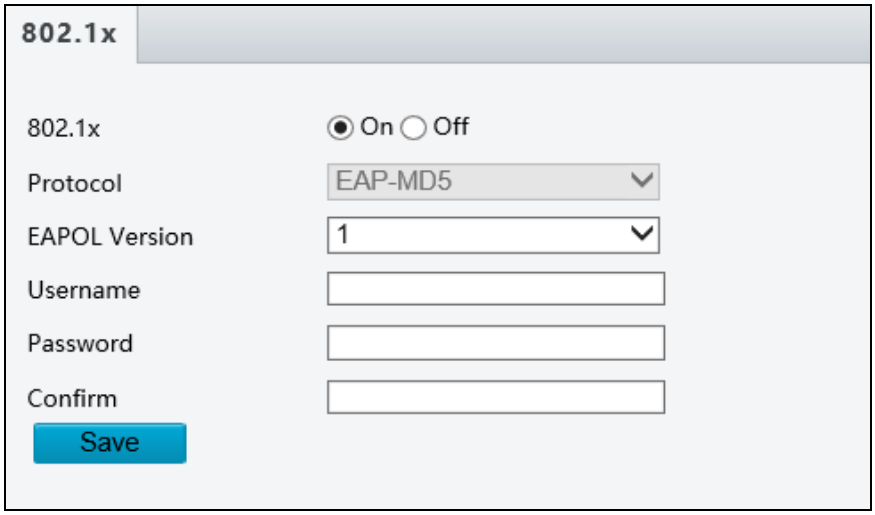



Figure 3-13

1. Enable **IEEE 802.1x**.
2. Type the **Username** and **Password**. Type the password again for confirmation.
3. Click **Save**.

Note: To use this function, your network environment needs to support **802.1x**.

4.2.7 E-mail


After configuring E-mail settings, you will be able to send messages to specified E-mail addresses when access events occur.

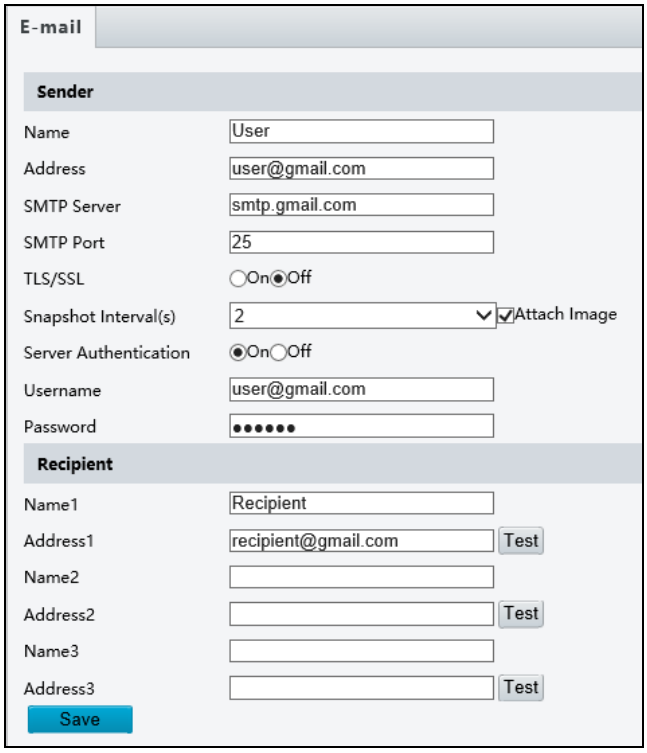

1. Type the **Name** and **Address** of the sender.
2. Type the **SMTP Server**.
3. Type the **SMTP Port** number. Default value is 25.
4. To send the e-mail through TLS / SSL encryption, enable **TLS/SSL**.
5. Enable **Attach Image** to include 2 instant snapshots as attachment in the e-mail according to the **Snapshot Interva**l specified.
6. If the SMTP Server needs authentication, enable **Server Authentication** and type a valid username and password to log in the SMTP server.
7. Type the name(s) and e-mail address(s) of the **Recipient**(s).
8. Click **Save**.

4.2.8 QoS

QoS is the prioritization of network traffic used to ensure resource reservation under abundant data flow.

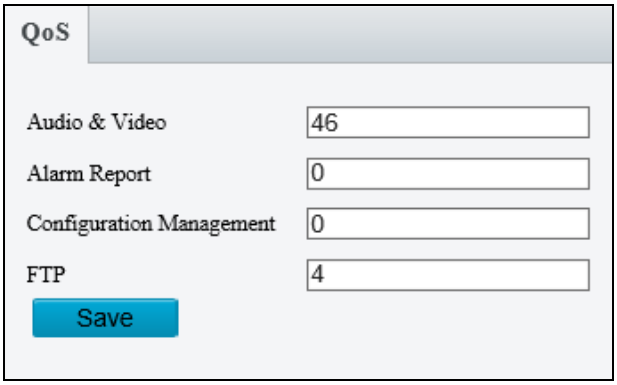


- **Audio & Video**: Optionally modify the priority of value of Audio & Video. The higher the value, the higher the priority.
- **Alarm Report**: Optionally modify the priority of value for Alarm Report. The higher the value, the higher the priority.
- **Configuration Management**: Optionally modify the priority for Configuration Manager. The higher the value, the higher the priority.
- **FTP**: Optionally modify the priority of value for FTP. The higher the value, the higher the priority.

Click **Save** the apply the QoS settings configured.

4.2.9 ONVIF

****The ONVIF function is not supported by GV-IA1330.****

If the network connection between the camera and the peer (stream receiving address) is disconnected, the camera can store videos according to the configured recording schedule; and after the network connection is restored, the camera can retransfer the video stored during the interruption period to the stream receiving address on the request of the peer.

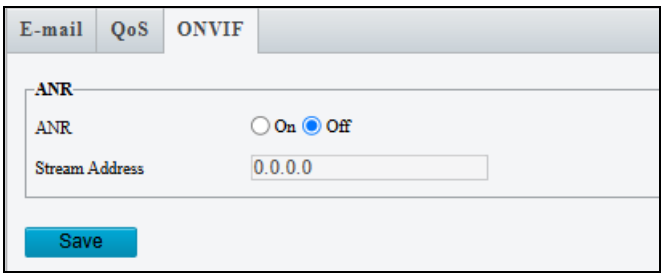

4.2.10 Platform Access


For the Platform Access settings, see *Chapter 3 GV-Cloud Access Control Integration*.

4.3 Video & Audio

Under the **Video & Audio**, you can configure video streams and the audio input.

4.3.1 Video

You can set video parameters for the controller's camera. You may also enable/disable the sub-stream as needed.

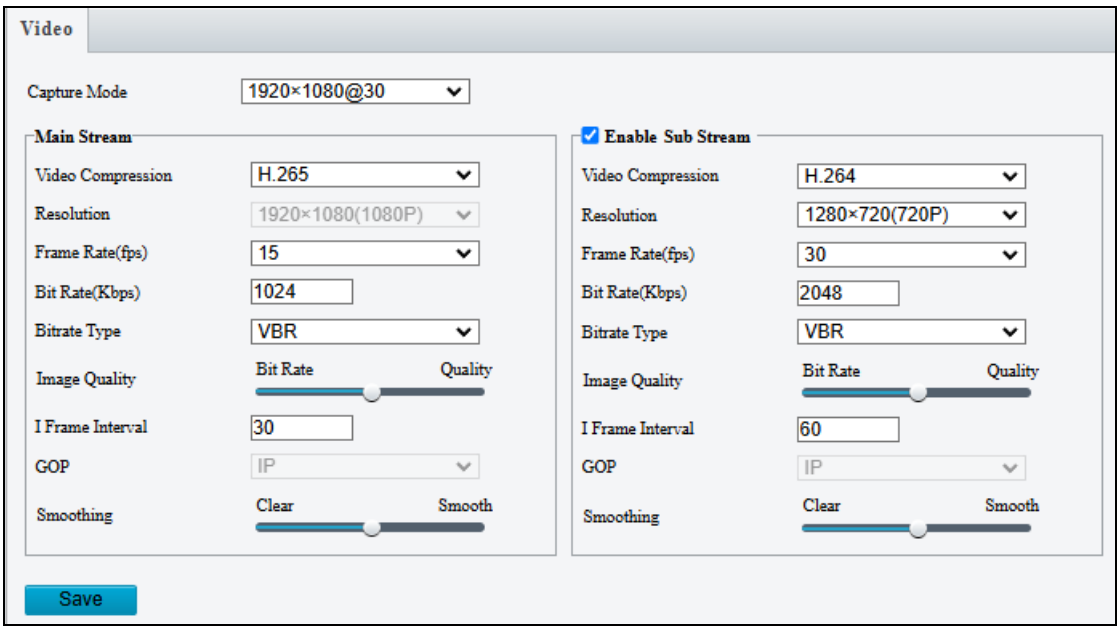


- **Capture Mode:** Set the resolution of Main Stream and the maximum frame rate allowed.

The following options are available for the main and sub streams.

- **Video Compression:** Set the codec type to **H.265, H.264** or **MJPEG**.
- **Resolution**: Set the resolution for sub stream.
- **Frame Rate**: Select a frame rate for encoding images. The unit is frame per second.
- **Bit Rate**: Set the value between **128~16384**.
- **Bitrate Type**:
  - ⊙ **CBR**: The camera transmits data at a constant data rate by varying the quality of the video stream.
  - ⊙ **VBR**: The quality of the video stream is kept as constant as possible at the cost of a varying bitrate.
- **Image Quality**: When VBR is selected for the encoding mode, you can move the slider to adjust the desired quality level the for images. Moving the slider toward **Bit Rate** decreases the bit rate and may affect image quality. Moving the slider toward **Quality** increases the bit rate and improves image quality.
- **I Frame Interval:** Set the number of frames, from 5 to 250, between each I frame (key frame). This option is only available when H.265 or H.264 is selected as the codec.
- **GOP:** The GOP is IP by default.
- **Smoothing**: Set the extent of smoothing. Choosing **Clear** means disabling **Smoothing**. Moving the slider toward **Smooth** increases the level of smoothing but will affect image quality.

4.3.2 Audio

You can configure the audio settings for the controller's camera.

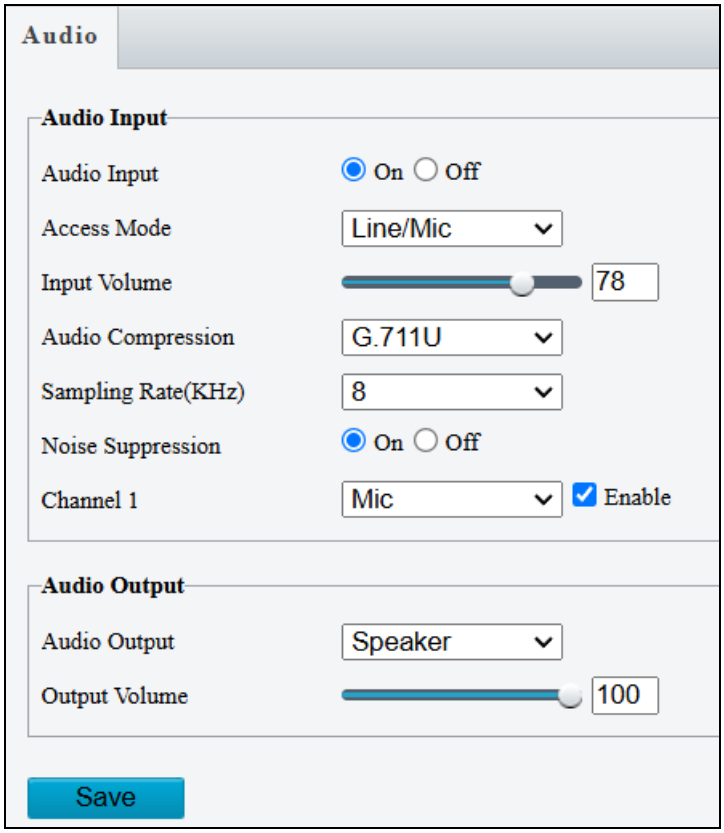

- **Audio Input**: Select **On** to enable audio input.
- **Input Volume**: Set the audio signal amplification for sampling. The greater the volume, the greater amplification.
- **Audio Compression:** Select an audio codec.
- **Noise Suppression**: Select **On** to reduce audio noise.
- **Channel 1**: Click **Enable** to enable audio in through the camera's built-in microphone.
- **Audio Output:** Select the source of audio output.
- **Output Volume:** Set the volume for audio output.


4.4 Image

Under the **Image**, you can configure image settings, on-screen display and privacy mask.

4.4.1 Image

This page allows you to adjust image settings such as brightness, exposure, IR illumination, white balance, and focus.

[Scene]

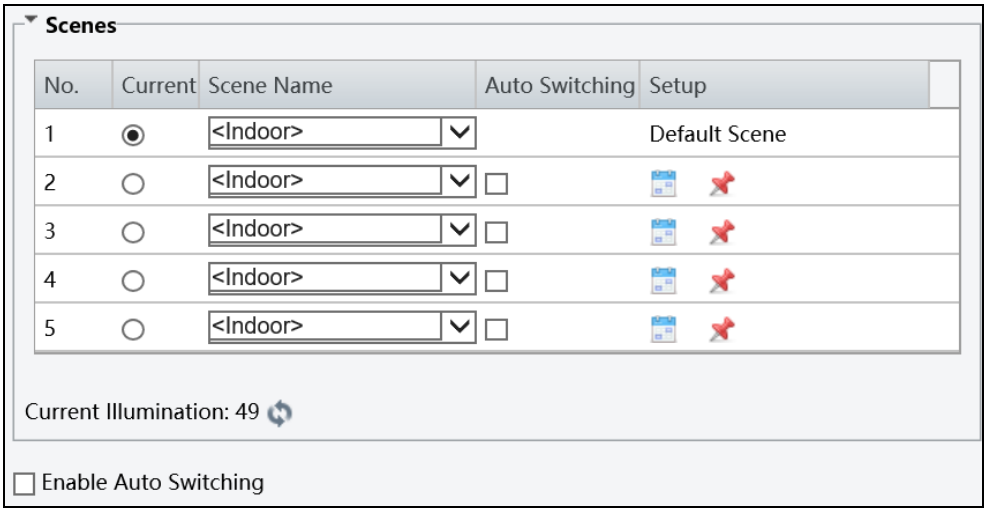


- **Current**: Indicate the scene that is being used.
- **Scene Name**: When you select a scene, the corresponding image parameters are displayed. You can adjust the image settings according to actual needs.
- **Auto Switching**: Indicates whether to add a scene to the auto-switching list.
- **Setup**:
  - **Click** to set a schedule for illumination.
  - **Click** to set a scene as the default scene.
- **Enable Auto Switching**: Allow the camera to switch to the scene automatically when the condition for switching to a non-default scene is met.

[Image Enhancement]



- **Brightness:** Adjust the degree of brightness of the image.
- **Saturation:** Adjust the amount of hue contained in a color.
- **Contrast:** Set the degree of difference between the blackest pixel and the whitest pixel.
- **Sharpness:** Adjust the sharpness of the image.
- **2D / 3D Noise Reduction**: Reduce the noise of the image.
- **Image Rotation**: Change the rotation of the image by selecting **Normal**, **Flip Vertical**, **Flip Horizontal**, **180°**, **90° Clockwise**, or **90° Anti-clockwise**.

[Exposure]

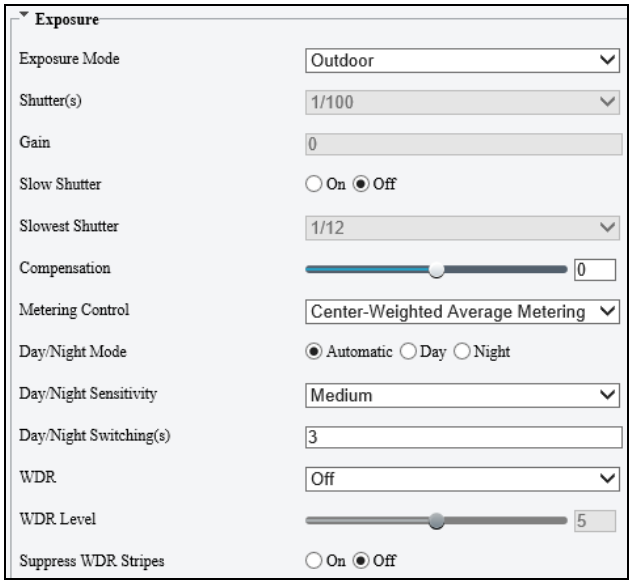

- **Exposure Mode:** Select the correct exposure mode to achieve the desired exposure effect. The default setting is Outdoor.
  - **Low Motion Blur:** Improve image quality by reducing motion blur in low light conditions.


- **Shutter(s):** The length of time that allows light to enter into the lens. You can set a shutter speed when **Exposure Mode** is set to **Manual** / **Custom**.

Note: If **Slow Shutter** is set to **Off**, the reciprocal of the shutter speed must be greater than the frame rate.

- **Gain:** Control image signals so that the camera outputs standard video signals according to the light condition. You can set this parameter only when **Exposure Mode** is set to **Manual** / **Custom**.
- **Slow Shutter:** Improve image brightness in low light conditions.
- **Slowest Shutter:** Set the slowest shutter speed that the camera can use during exposure.
- **Compensation:** Adjust the compensation value as required to achieve the desired effects. You can set this parameter only when **Exposure Mode** is not set to **Manual** / **Custom**.
- **Linear Stripe Suppression:** For indoor use only. Reduce stripes by limiting shutter frequency. You can only enable either Line Strip Suppression or WDR, but not both at the same time.
- **Metering Control**: Set the way the camera measures the intensity of light. You can only set this parameter when **Exposure Mode** is not set to **Manual** /**Custom**.
  - **Center-Weighted Average Metering:** Measure light mainly in the central part of the images.
  - **Evaluative Metering (BLC):** Measure light in the customized area of the images.
  - **Face Metering**: Measure light where facial recognition is established.
  - **Spot Metering**: Measure light spot(s) in the specified area of the images.
- **Day/Night Mode:** Select **Automatic** for automatic switch between day mode and night mode depending on the amount of light detected. Select **Night** to produce high-quality black and white images using the existing light. Select **Day** to produce high-quality color images using the existing light. Select **Input Boolean** to trigger an output device and switch on night mode upon common alarm / AI event alarm (only applicable to GV-EBFC5800 / GV-TDR8802).
- **Day/Night Sensitivity:** Set the light threshold for switching between day mode and night mode. The higher the sensitivity, the more easily the camera is to switch from day mode to night mode and vice versa.


- **Day/Night Switching(s):** Set the length of time before the camera switches between day mode and night mode after the conditions for switching are met.
- **WDR:** Enable WDR to distinguish the bright and dark areas in the same image.
- **WDR Level:** After enabling the WDR function, you can improve the image by adjusting the WDR level.
- **Suppress WDR Stripes**: Enable Suppress WDR Stripes to automatically adjust shutter frequency based on the frequency of light measured.

[Smart Illumination]

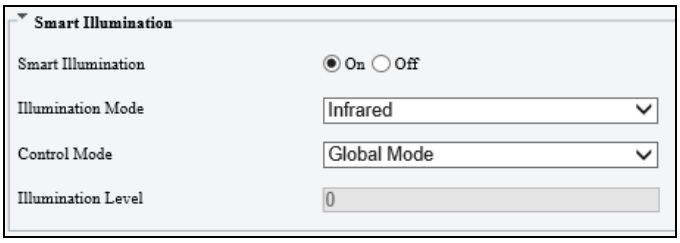

- **Smart Illumination:** Select **On** to adjust the IR illumination settings.
- **Illumination Mode:** Set to **Infrared** by default.
- **Control Mode:**
  - ⊙ **Global Mode**: Adjust IR illumination and exposure to achieve balanced image effects. Some areas might be overexposed if you select this option. This option is recommended if monitored range and image brightness are your first priority.
  - ⊙ **Overexposure Restrain**: Adjust IR illumination and exposure to avoid regional overexposure. Some areas might be dark if you select this option. This option is recommended if clarity of the central part of the image and overexposure control are your first priority.
  - ⊙ **Manual / Custom Level:** Allow you to manually control the intensity of IR illumination.
- **Illumination Level:** When **Control Model** is set to **Manual** / **Custom Level,** you can set the intensity level of the IR light. The greater the value, the higher the intensity. 0 means that the IR light is turned off.


[White Balance]

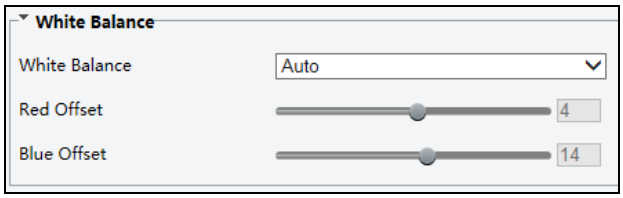

- **White Balance**: Adjust the red or blue offset of the image.
  - **Auto / Auto 2:** Adjust the red and blue offset automatically according to the light condition (the color tends to be blue). Select **Auto 2** if the images remain unnaturally red or blue.
  - **Outdoor:** It is recommended for outdoor scenes with a wide range of color temperature variation.
  - **Fine Tune:** Allow you to adjust the red and blue offset manually.
  - **Sodium Lamp:** Adjust the red and blue offset automatically according to the light condition (the color tends to be red).
  - **Locked:** Lock the current color temperature settings without adjustment.

4.4.2 OSD

The On Screen Display (OSD) is the text displayed on the screen of video images and may include the date and time and other customized contents.

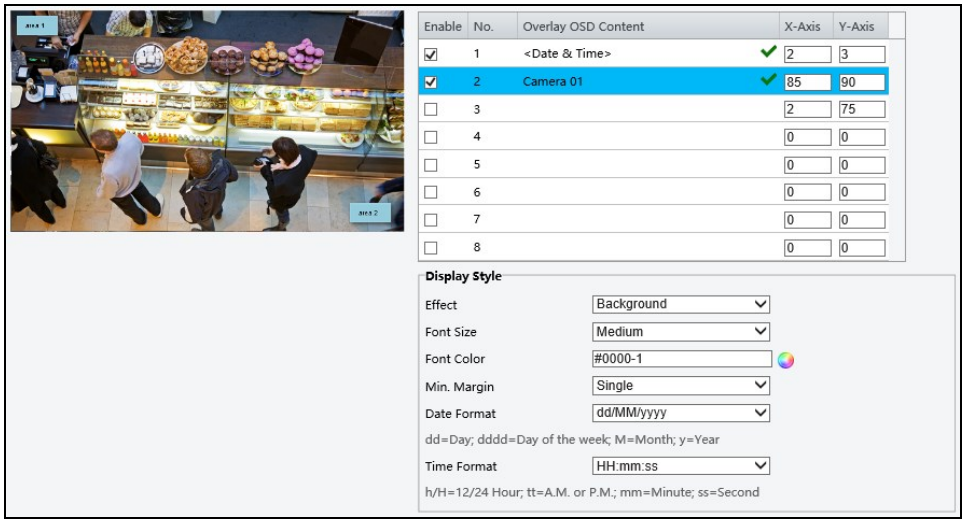


1. To show content on the screen, enable an area number and click the **Overlay OSD Content** field.
2. Drag the Area # box to adjust the position on the live view or specify the coordinates in the **X-Axis** / **Y-Axis** column.
3. Under **Display Style**, customize the text style, date/time format, and use **Min. Margin** to adjust the minimum margin between the OSD and the image's border.

After you have set the position and OSD content, the ✔ symbol appears in the **Status** column, which means that the OSD is set successfully.

4.4.3 Privacy Mask


On certain occasions, you may need to set a mask area to block out parts of the camera image to protect privacy. Up to 4 privacy masks are supported.

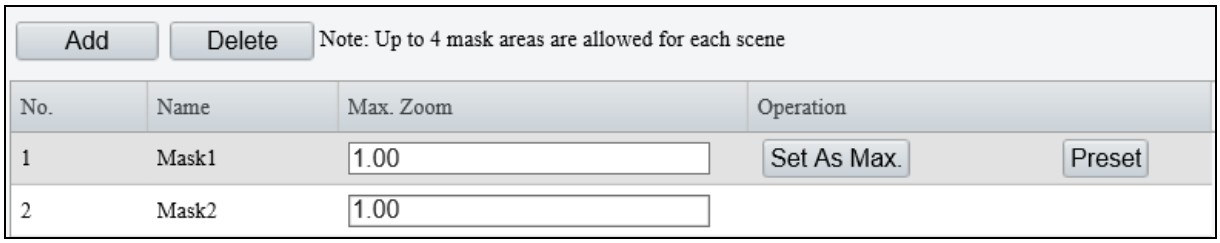

1. Click Add to place a privacy mask on the live view.
2. Drag the **Mask** box to the intended position and adjust the size of the box. Alternatively, you can also use the mouse to draw a box on the area you want to mask.
3. Repeat steps 1 and 2 to add more masks.
4. To delete a mask, select the desired mask and click Delete.


4.5 Storage

The Storage feature allows you to format the memory card and view its status. The memory card is used to store up to 100,000 card records, along with access logs and snapshots when the controller is disconnected from GV-Cloud Access Control.

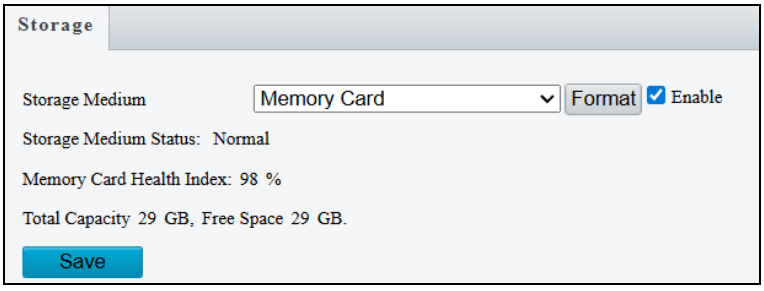

- **Storage Medium**: Click **Format** to format the memory card and select **Enable** to activate the memory card.

Note: For first-time setup, ensure the memory card is inserted and formatted. Verify that the Free Space field displays a valid volume (in GB). If **Free Space** shows **0 GB**, format the card before use.

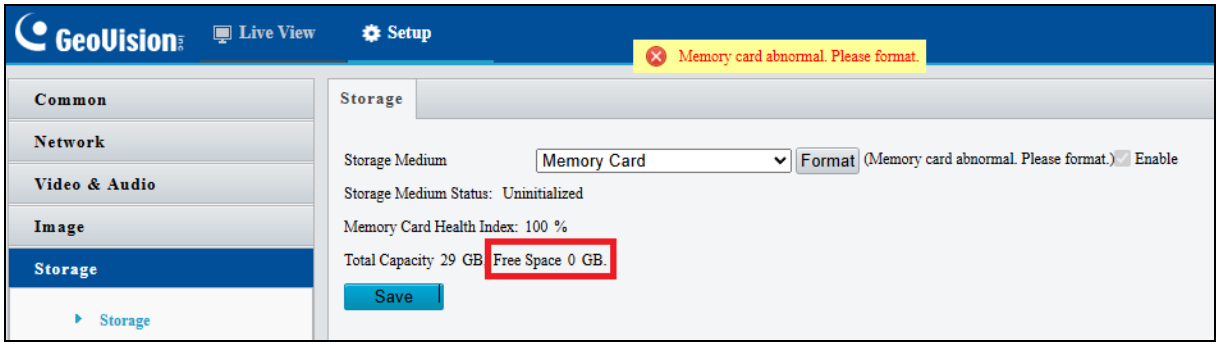


4.6 Security

Under the **Security**, you can create user accounts and configure network security settings.

4.6.1 User

There are three types of accounts: **Administrator**, **Common User**, and **Operator**.

- **Administrator:** Admin has full access to all settings. There is only one administrator account.
- **Common User:** Common User can only play live and recorded videos. Up to 31 common users are allowed in the system.
- **Operator:** Operator has access to the following features: live view, snapshots, two-way audio, logs. Additionally, the operator is granted configuration permissions under Parameter Configuration, Event, Subscription, Maintenance, and Upgrade.

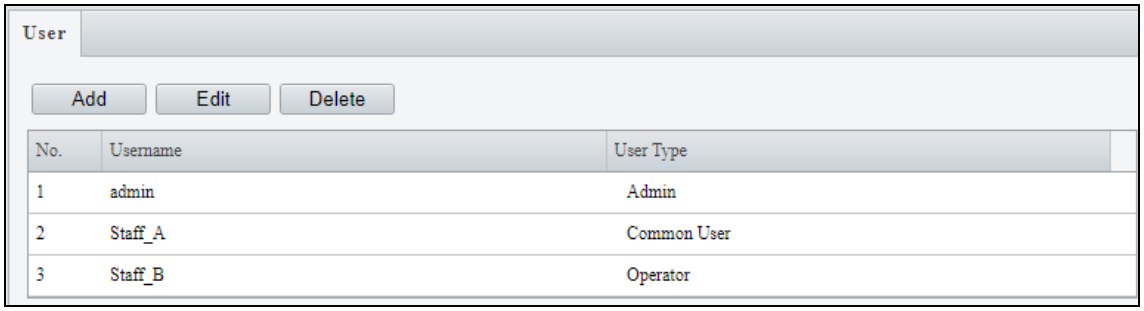

Note:

1. The administrator account's username is fixed and cannot be changed.
2. If a user's username or password is modified while they are logged in, the system will force a logout. The user must then log in again using the updated credentials.
3. The playback function is not supported by GV-IA1330.


4.6.2 Network Security


There are six types of network security settings: **HTTPS**, **Authentication**, **ARP Protection, IP Address Filtering**, **Access Policy**, and **Certification Management**.

HTTPS

You can enable **HTTPS (Hypertext Transfer Protocol Secure)** to access the camera through a secure connection.


Click **On** to use the default certificate, or go to **Certification Management** to import or create your own certificate for upload.

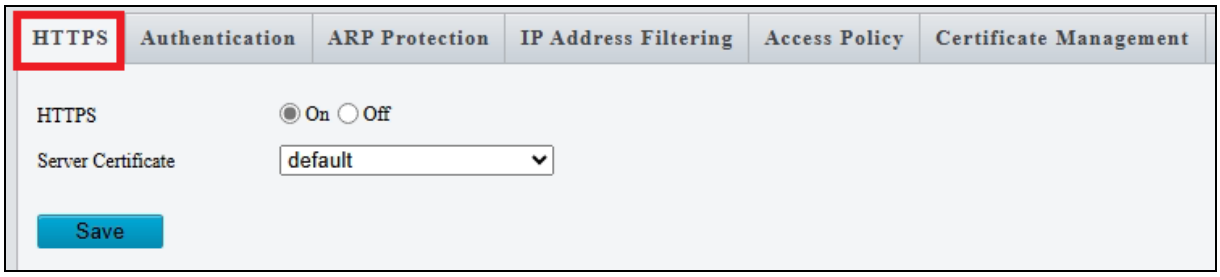

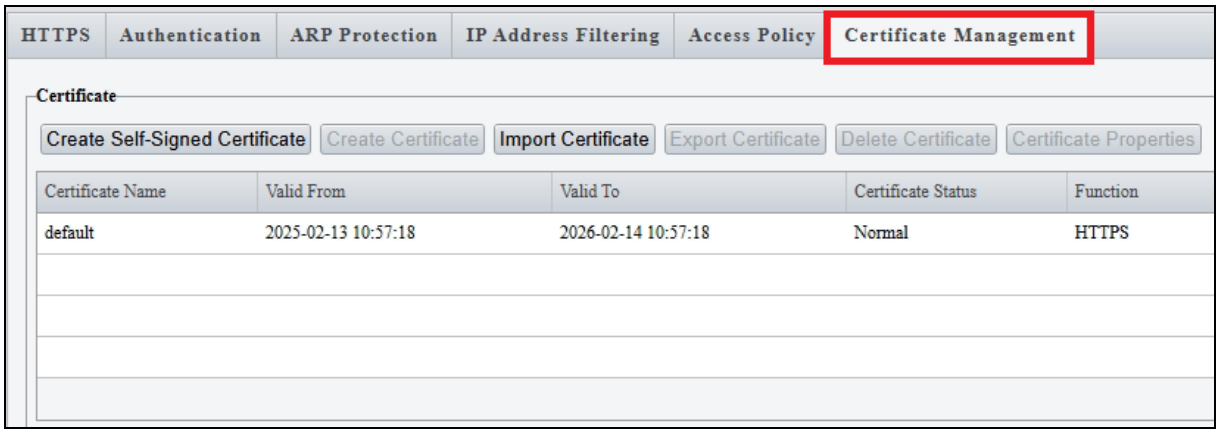

Authentication

RTSP (Real Time Streaming Protocol) and HTTP (Hypertext Transfer Protocol) are different application layer protocols for transmitting video. Set the **Authentication** mode for RTSP streaming or HTTP streaming.

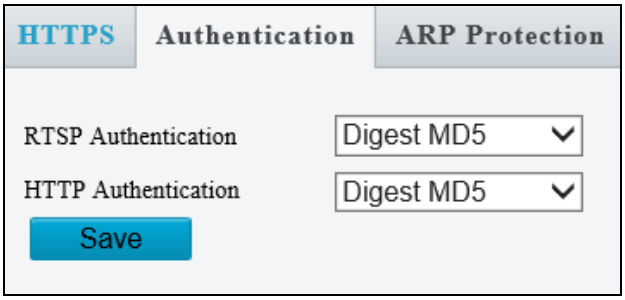

[RTSP Command]

rtsp://<ID>:<Password>@<IP>/<media#>/<video#>

<IP> specifies the IP address of GV-IA1330.

<media#> specifies the channel number.

<video#> specifies the main stream (1) or sub stream (2).

For example, to view the channel No. 2 and main stream of GV-IA1330, the command is as follows: rtsp://admin:admin@192.168.3.111/media1/video1

[HTTP Command]

http://<IP of GV-IA1330>/images/snapshot.jpg


For example, http://192.168.0.10/images/snapshot.jpg

When the Windows Security dialog box appears, type the GV-IA1330's **user name** and **password** to receive the captured snapshot.


Note: Only VLC and QuickTime players are supported for video streaming via RTSP protocol.

ARP Protection

This function can protect the controller from ARP attacks. When the controller visits an IP address of another network segment via a gateway, it can only communicate with the MAC address binding to the gateway address in the same segment.

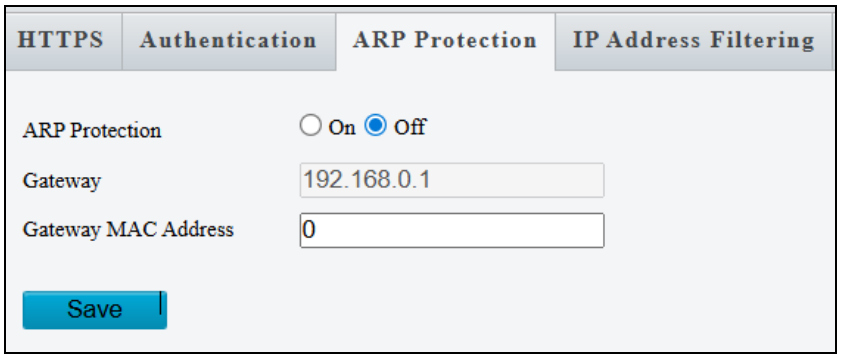


IP Address Filtering

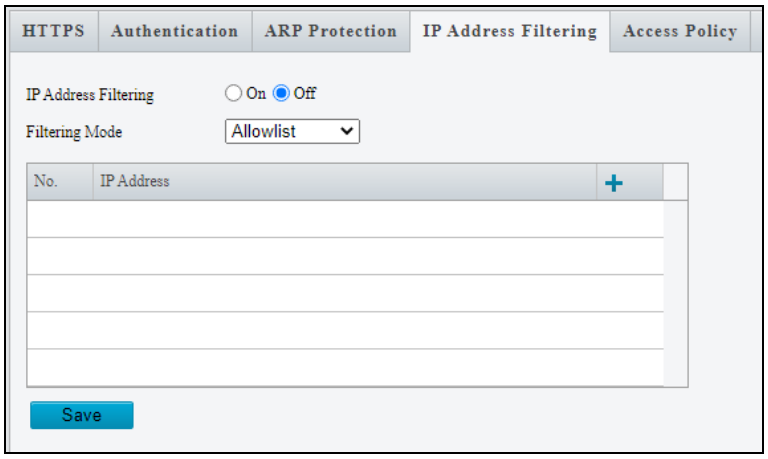

1. Select **On** to enable the IP address filtering.
2. Choose a Filtering Mode: **Allowlist** or **Deny Access**.
3. Click + to add an IP address.
4. Click 🗑 to delete an IP address.
5. Click **Save**.

Access Policy

Access Policy evaluates strength of account passwords during login to enhance system security.

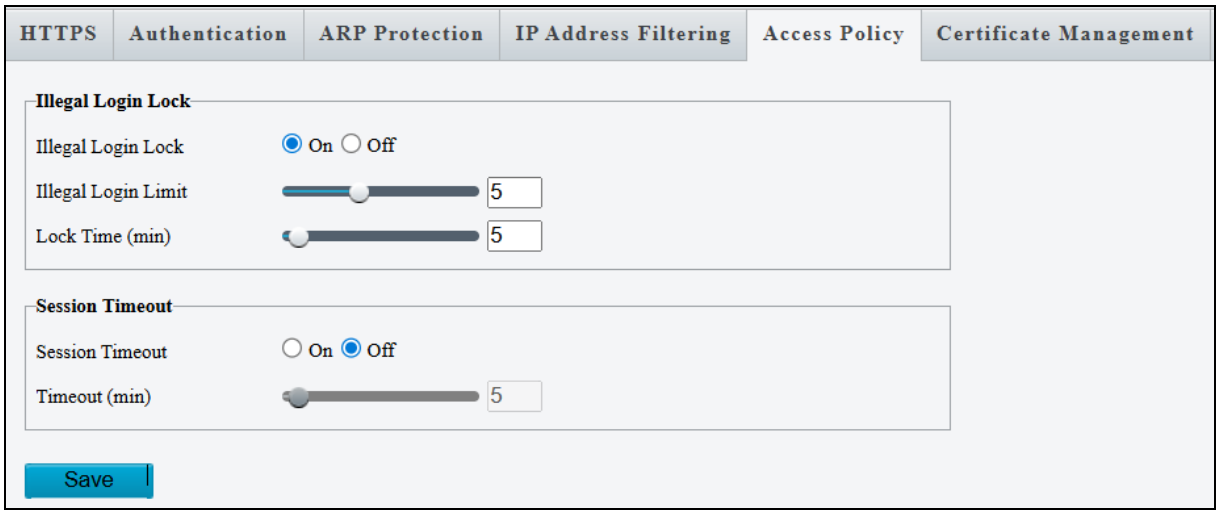

[Illegal Login Lock]

1. Select **On** to enable account lockout after repeated login fails.
2. Specify **Illegal Login Limit** and **Lock Time** to activate the lockout when reaching the number of failed login attempts and for the lockout duration.

[Session Timeout]

1. Select **On** to enable automatic logout.
2. Specify the **Timeout** duration for user inactivity before the controller logs out the session automatically.


4.7 System

Under the **System**, you can:

- Configure the controller's date and time
- Set parameters for door locks, alarms, and output devices
- Manage extra reader connections
- Perform firmware updates
- View and export the system log

4.7.1 Time

You can use the following methods to adjust the controller's system time.

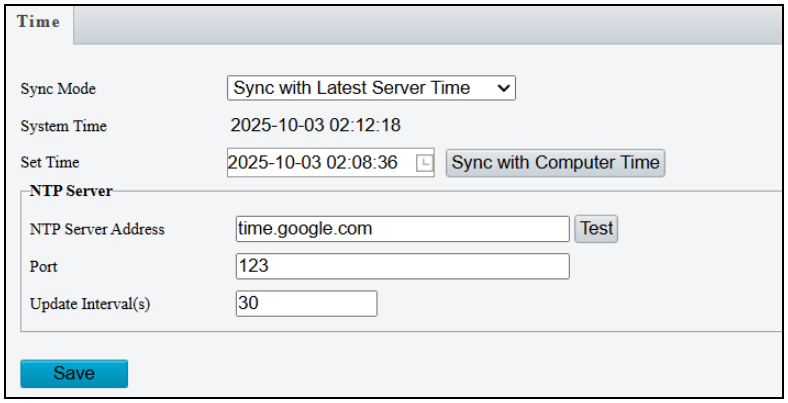

[Sync Mode]

- **Sync with System Configuration**: Manually set up a time and date.
- **Sync with NTP Server**: Synchronize with a Network Time Protocol (NTP) server. Enter the server's IP address or domain name, and specify the update interval. **For GV-IA1330 users, it is recommended to synchronize time and date settings using a NTP server.**
- **Sync with ONVIF Access Time**: Synchronize with the Management Server using the ONVIF protocol.
- **Sync with Latest Server Time**: Synchronize with the latest updated time, either via ONVIF or the Web interface.


****The Sync with Computer Time function is not supported by GV-IA1330.****

In the Sync with System Configuration and Sync with Latest Server Time modes, the **Sync with Computer Time** button becomes available. Clicking this button will immediately synchronize the controller's time with your local computer time.

4.7.2 Ports & Devices


Volume Control

This page allows you to adjust the volume of the controller doorbell.

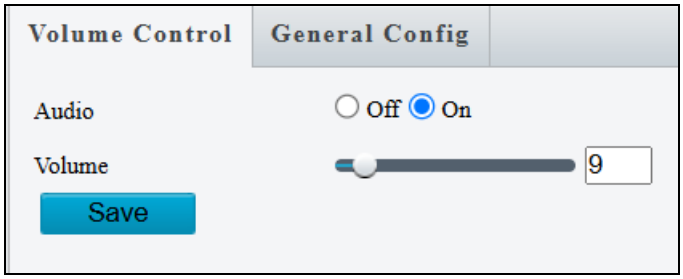

General Config

This page allows you to configure the door lock, alarms, input devices and connected readers.

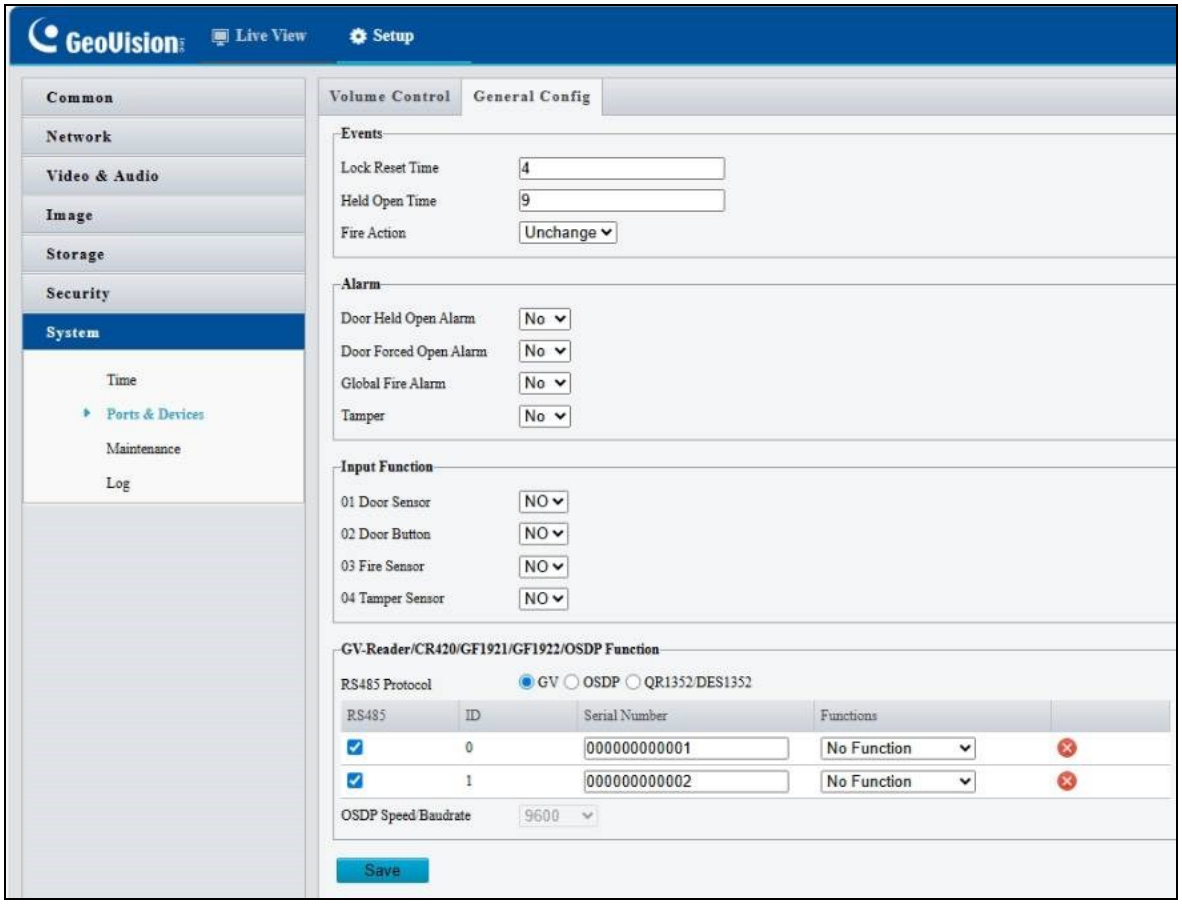

[Events]

- **Lock Reset Time:** Sets the duration (1 to 600 sec.) that a door remains open after which it will automatically be re-locked.
- **Held Open Time:** Sets the maximum time (5 to 9999 sec.) that a door can be held open before an alarm is generated.
- **Fire Action:** Sets the door behavior during a fire condition: **Lock**, **Unlock**, or **Unchanged** (remains the door's current state).

[Alarm]

Select **Yes** to activate or **No** to disable the following alarm functions:


- **Door Held Open Alarm:** The alarm activates whenever the door is held open beyond the configured time threshold.
- **Door Forced Open Alarm:** The alarm activates whenever the door is opened by force, bypassing normal access control.
- **Global Fire Alarm:** The alarm activates whenever fire is detected.
- **Tamper:** The alarm activates whenever the temper sensor is triggered. The tamper sensor must be installed separately and the triggering conditions depend on the type of sensor used, such as the controller's cabinet being opened.

[Input Functions]

The controller supports 4 types of input devices including Door Sensor, Door Button, Fire Sensor and Tamper Sensor. Set the input status to either NO (Normally Open) or NC (Normally Close).

[GV-Reader/CR420/GF1921/OSDP Function]

GV-IA1330 supports up to two readers via RS-485 or OSDP protocols. Supported models include GeoVision RS-485 readers, OSDP-compliant readers, and the GV-QR1352 / DES1352. Note that mixing different types of readers is not supported.

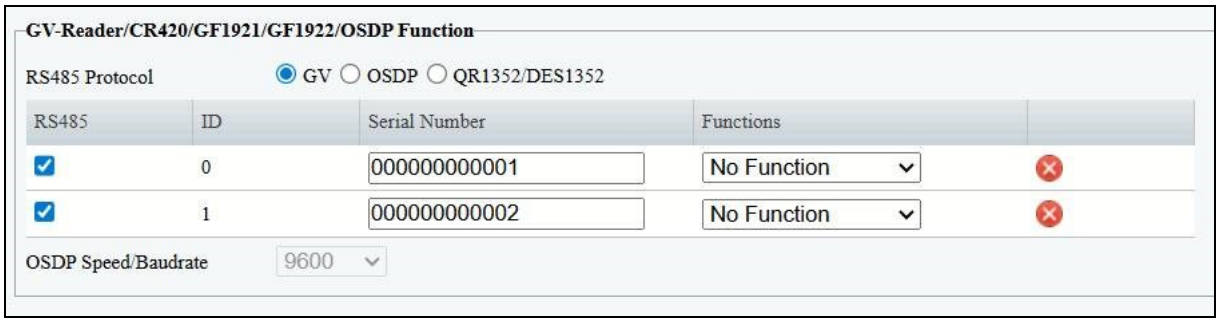


To connect a reader:

1. Select **GV**, **OSDP**, or **QR1352/DES1352.**
2. Ensure the **RS485** checkbox is selected.
3. Under Functions, define whether the reader is installed for exit or entry.

4.7.3 Maintenance

This page allows you to upgrade firmware, restart the controller, and backup/import controller configurations.

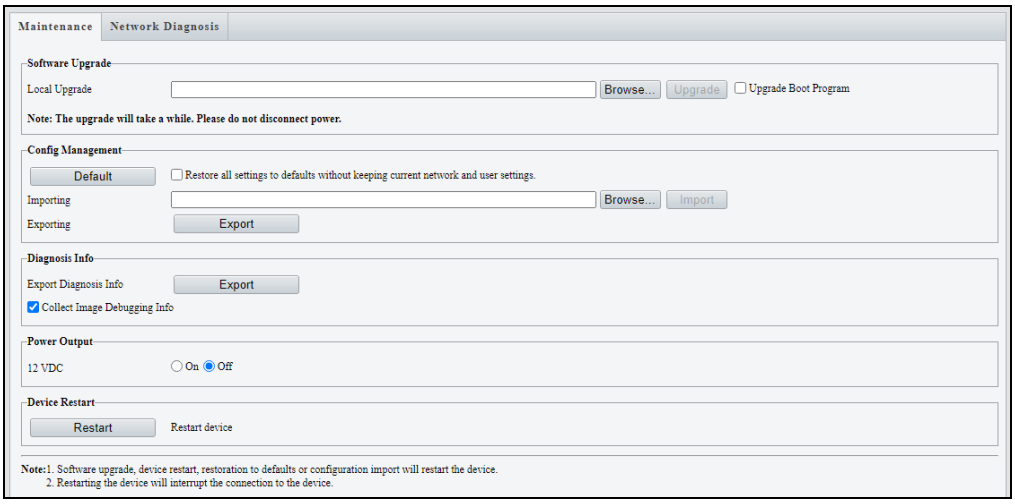

[Software Upgrade]

For details on firmware upgrade, see *Chapter 5 Firmware Upgrade.*

[Config Management]

Export the controller's current configurations and save them to a PC or an external storage device. You can also quickly restore configurations by importing backup configurations from your PC or external storage device back to the controller.

Note:


1. When exporting the configuration file, you will be prompted to set a password, which will be later requested for importing the file.
2. To ensure a successful configuration import, avoid using the exported file from a different firmware version and model.

[Diagnosis Info] Includes logs and system configurations. Click **Browse** to select a destination folder on your PC and then click **Export** to save diagnostic information.

[Device Restart] Click **Restart** to restart the controller after you confirm this operation. You can also set up a day and time for automatic restart.

4.7.4 Log

Log allows you to inquire configurations made on the controller and export the information to the local PC.

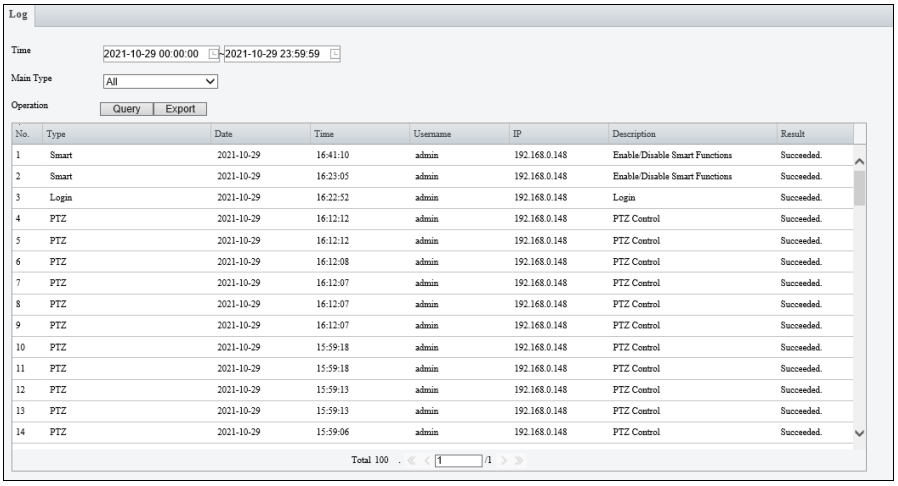


Chapter 5 Firmware Upgrade

GeoVision updates the GV-IA1330 firmware and publishes the latest version on the official website. Firmware can be loaded into the controller using its **Web interface** or **GV-IP Device Utility**.

After unzipping the downloaded firmware file, you will find the two sub-files, as illustrated below.

- A **zip** file for the camera firmware
- A **patch** file for the controller firmware




Through the Web interface:

1. On the controller's Web interface, select **System** > **Maintenance**.
2. To upgrade the camera firmware, click **Browse** and select the **.zip** file.
3. After upgrade is complete, the device will automatically restart. Re-log in the controller's Web interface to continue.
4. To upgrade the controller's firmware, go to the Maintenance page, click **Browser** and select the **.patch** file.


Through GV-IP Device Utility:

The utility can be downloaded from our website.

1. Open the utility. It will automatically detect the devices on the same LAN.
2. Select the GV-IA1330 on the list, and select **Configure**.

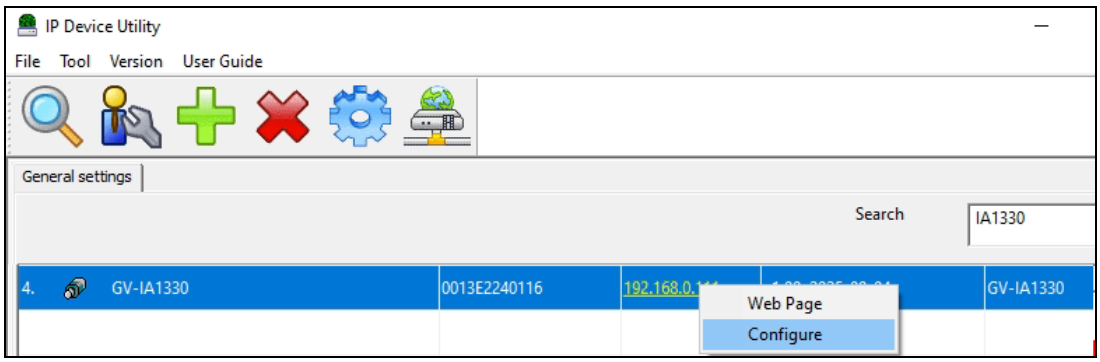


3. Select **Firmware Upgrade**.

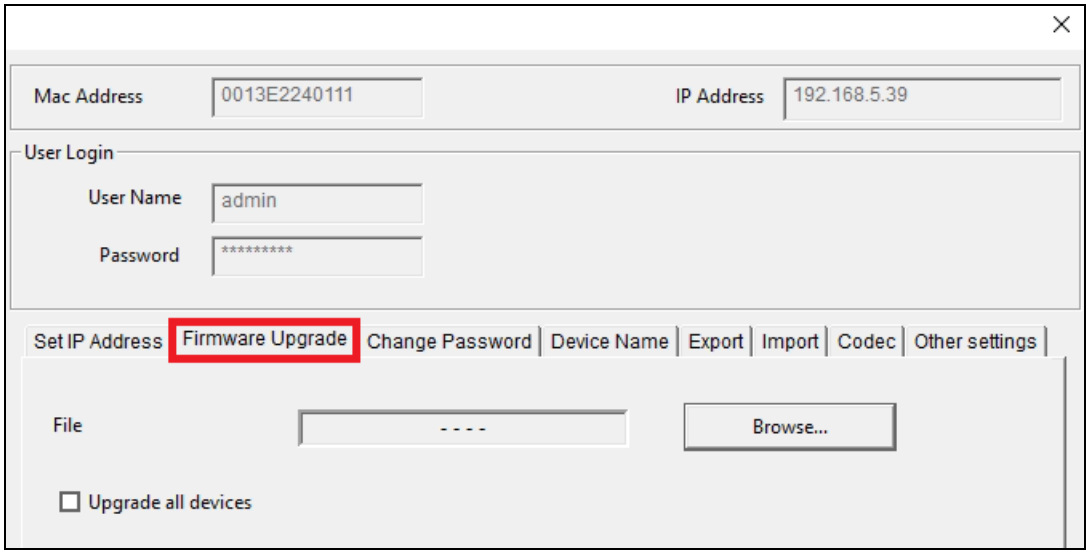

4. To upgrade the camera firmware, click **Browse** to locate the .zip file. Click **Upgrade**.
5. After the upgrade is complete, the device will automatically restart. Go to the **Firmware Upgrade** dialog box again.
6. To upgrade the controller firmware, click **Browse** and select the .patch file. Click **Upgrade**.

To verify the firmware upgrade:

Go the controller's Web interface, and select **Common** > **Basic Info**. You can find the current camera firmware version and controller firmware version, as shown below:

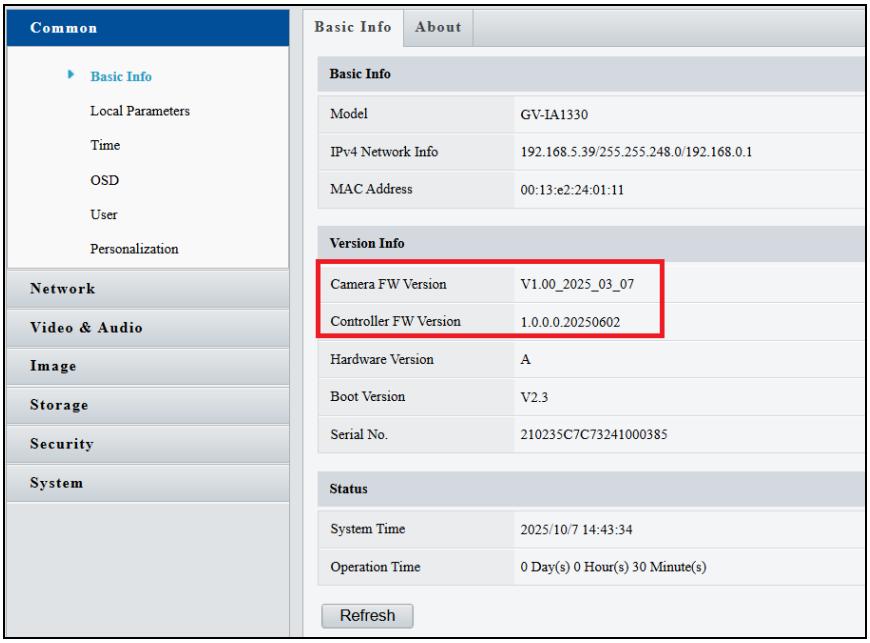

Appendix

Optional Installation-GV-Mount929


You can optionally purchase the **GV-Mount929 Sunshield Wall Mount** for wall installation.

GV-Mount929 Packing List

1. Sunshield Wall Mount



Dimensions

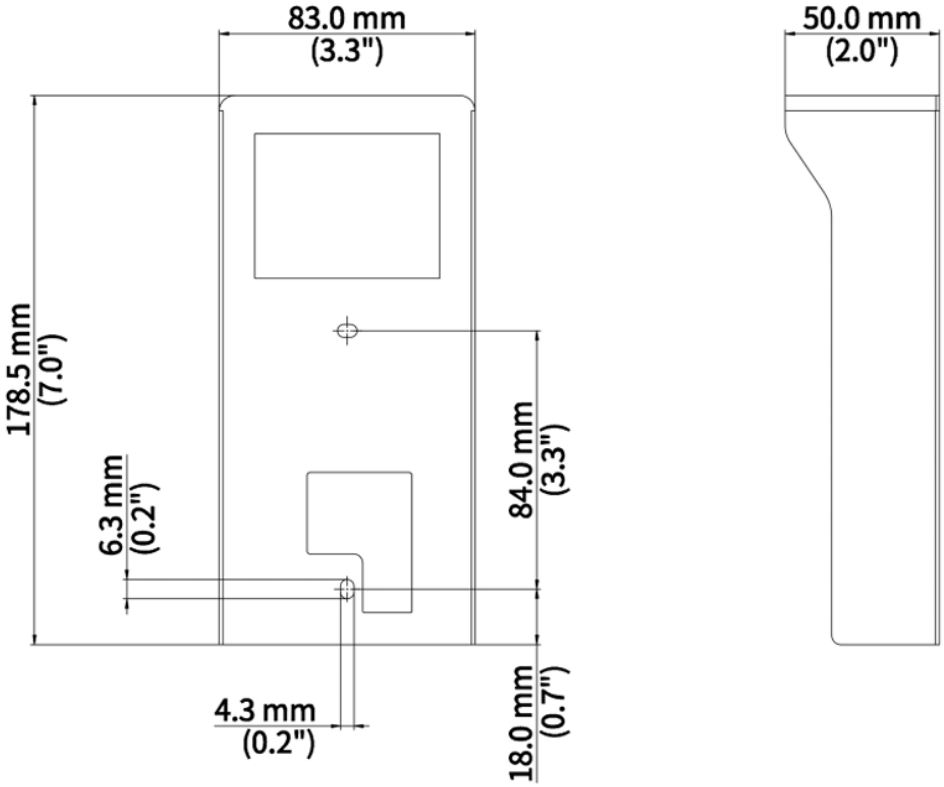

Installation

To install the **Sunshield Wall Mount**, follow the steps below.

1. Keep the two snaps on the bracket facing upward and the screw hole at the bottom of the bracket facing outward.
2. Tighten the bracket and sunshield.
   - With junction box: Align the screw holes of the bracket and sunshield to those of the junction box, insert two countersunk screws, and tighten them.
   - Without junction box: Insert two M3.5 x 25mm countersunk self-tapping screws into the expansion bolts to fix the bracket and sunshield.

